

Lina W TV 73 s/s

Data sheet

Details

- Boiler unit as Tunnel version
- Detachable heat exchanger
- 7345 – Height 45 cm
7351 – Height 51 cm
- Self-closing door
- Without cast grate / ash box
- Standard fire box inner lining: white smooth chamotte
- Cast-iron flue gas connector: Ø 180 mm, optional: horizontal flue gas connector
- Overall height can be simply and quickly adjusted
- Easy to dismantle for transport



Lina W TV 73 with hinged front and rear side

Technical data

	DE	Export
• Nominal heat output	11kW	20kW
• Water heat output	6,6 kW	12,3 kW
• Efficiency	>80 %	>80 %
• Insulation thickness (with wall that does not need to be protected) (based on SILCA® 250KM)	60 mm	60 mm
• Combustion air connector	Ø 150 mm	Ø 150 mm
• Recommend length of logs	33 cm	33 cm
• Weight	300 kg	300 kg
• Heat distribution through the viewing window	20 %	20 %
• Heat distribution, convective output	20 %	20 %
• Heat distribution: waterside output	60 %	60 %
• Water content	37,5ltr.	37,5ltr.
• Max. operating pressure	3,0 bar	3,0 bar

Data for chimney sweep according to DIN EN 13384 (Closed operation)

Triple values with nominal heat output

• Flue gas mass flow	9,4 g/s	16,9 g/s
• Flue gas temperature	229 °C	224 °C
• Required delivery pressure	12 Pa	12 Pa

Triple values for calculating ceramic flues (wood fuel)

• Recommended flue length ¹	–	–
--	---	---

Data for closed design

• Minimum heat-emitting surface ²	1,4 m ²	1,4 m ²
--	--------------------	--------------------

¹The information regarding flue lengths is a recommendation and based on the calculation in accordance with TROL 2022 chapter 15. The calculation is based on a medium-heavy design and a flue ratio of 360 cm².

²Average value based on the storage time. Dependent on the material properties and the construction thickness. Mean specific heat distribution = approx. 500 W/m²

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 01/2024

Standard



Tunnel version



Kristall front



Door hinge on left



Door hinge on right



Double glazing

Optional



150 mm
Combustion air connector

Accessories



SMR



Energy efficiency class in accordance with (EU) 2015/1186




1. Federal Emissions Control Ordinance Stage 2




Lina W TV 73 s/s

Dimensional drawing


Front view, scale 1:20

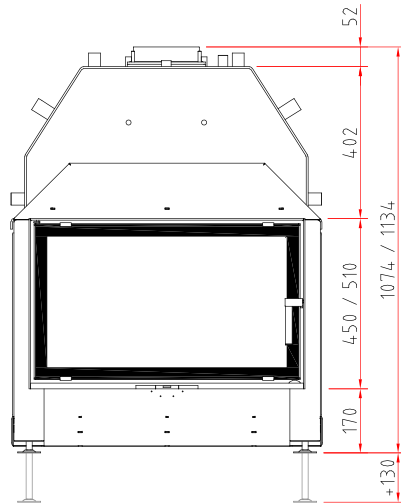

Side view, scale 1:20

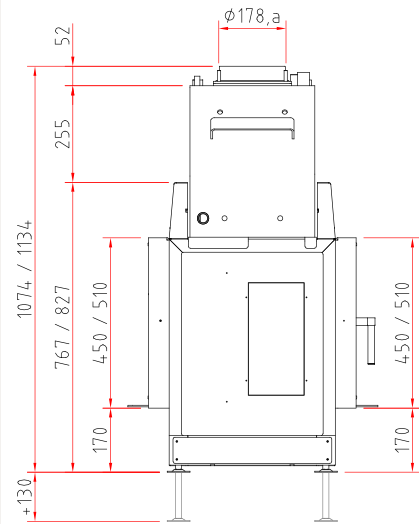

Top view, scale 1:10

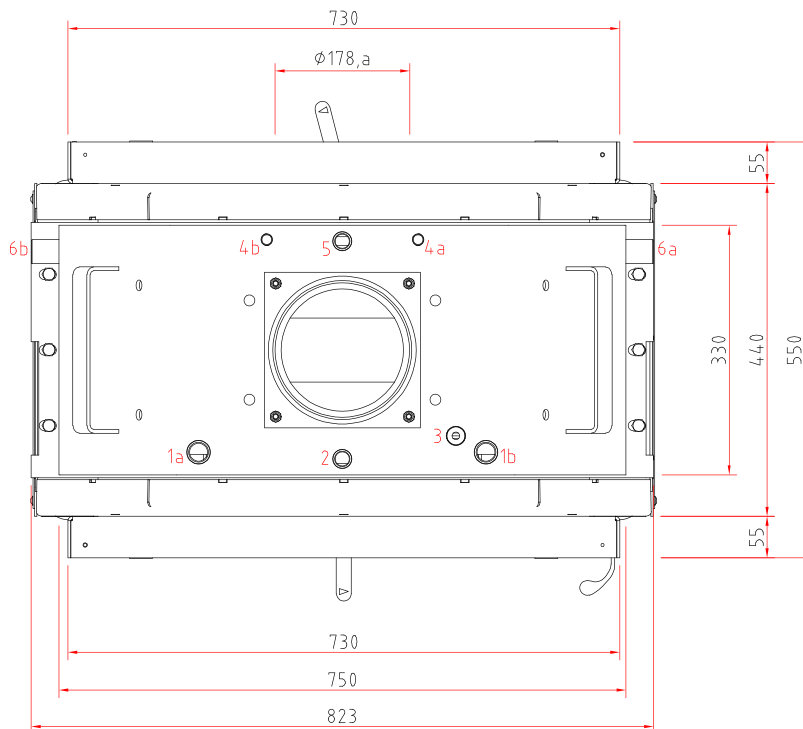

Water connections

- 1a Heating flow 1 3/4" female
- 1b Heating flow 2 3/4" female
- 2 Cappilar tube TAS 1/2" female
- 3 SMR fire chamber sensor M12x1,5
- 4a TAS Inflow / Outflow 1 1/2" male
- 4b TAS Inflow / Outflow 2 1/2" male
- 5 Pump control sensor 1/2" female
- 6a Return 1 3/4" female
- 6b Return 2 3/4" female

Important notes

- Ensure that all connections and safety devices are accessible (e.g. grille or inspection door).
- Never exceed the maximum ambient temperature of 160 °C.
- Fit the safety valve, thermal discharge safety device and air vent in the cold part of the system, if required.

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Lina W TV 73 s/h
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	Lina W TV 73 s/h
Energy efficiency class:	A+
Direct heat output (kW)	4,4
Indirect heat output (kW):	6,6
Energy efficiency index (EEI):	113,3
Energy efficiency at nominal heat output (%):	85,0
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!




There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενεργεια



Camina  Schmid Lina W TV 73 s/h

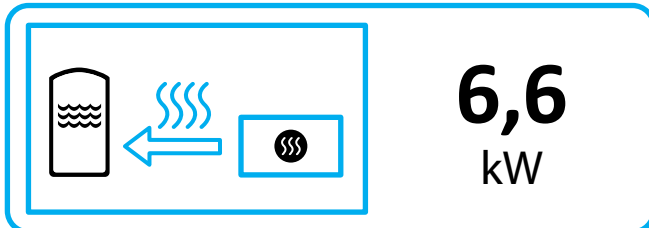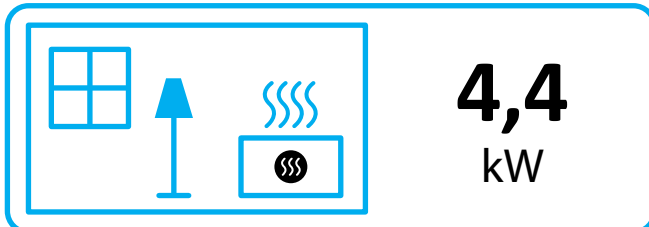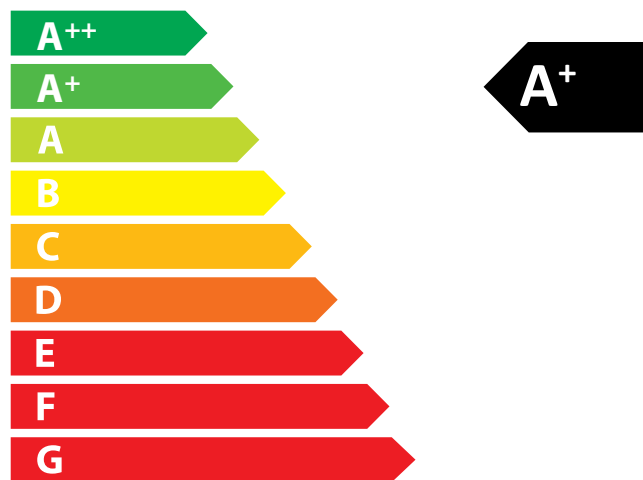

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Lina W TV 73 s/h
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	Lina W TV 73 s/h
Energy efficiency class:	A+
Direct heat output (kW)	7,7
Indirect heat output (kW):	12,3
Energy efficiency index (EEI):	113,3
Energy efficiency at nominal heat output (%):	85,0
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid Lina W TV 73 s/h



Icon showing a window, a radiator, and a boiler, representing heating power.

7,7
kW

Icon showing a refrigerator and a boiler, representing cooling power.

12,3
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186