Lina G 73

Data sheet

Details

- Gas fireplace insert, open on one side
- Versatile burner system with efficient and energy-saving combustion technology
- Fire box inner lining: anthracite sheet steel (matt) or black ceramic glass (polished)
- Realistic ceramic wood logs
- Dynamic and realistic flame pattern you will never tire of
- Optional: LED ambient lighting
- Can be connected to an existing gas supply and also integrated into existing fireplaces

Technical data*

Nominal heat load	9.5 kW
Output range	2.8 – 7.8 kW
Electrical power consumption	10 W (max.) / 3 W (standby)
Flue gas pipe connector	Ø 130 / 200 mm
Gas connection	1/2"
Permitted concentric flue system (LAS)	Schmid LAS
Type of gas installation	C11, C31, C91
Fire box appearance	Realistic ceramic wood logs
Weight including control and ceramic wood logs, approx.	190 kg



Lina G 73 with fire box inner lining, anthracite sheet steel (matt)

Standard



Sheet steel anthracite (matt)



Ceramic glass black (polished)

Accessories



LED ambient Lighting



Gas safety hose

A

Energy efficiency class in accordance with (EU) 2015/1186

Made in Germany


* based on natural gas I_{2H}

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2019


Lina G 73

Dimensional drawings


Front view, scale 1:20

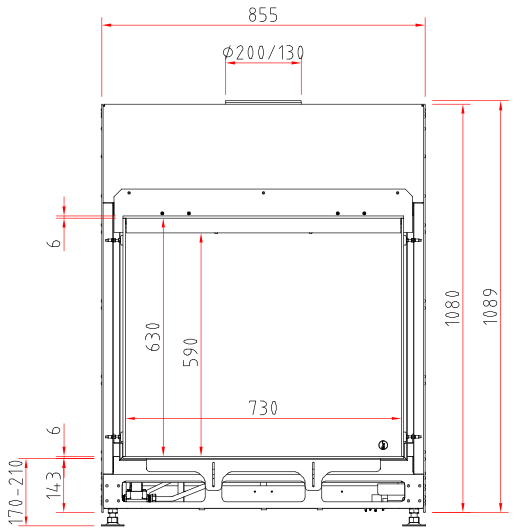

Side view, scale 1:20

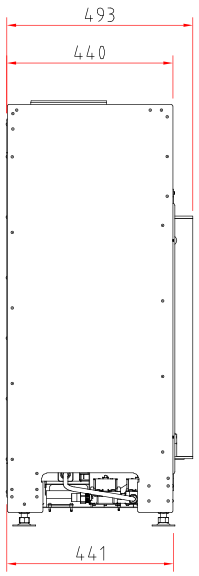

Top view, scale 1:10

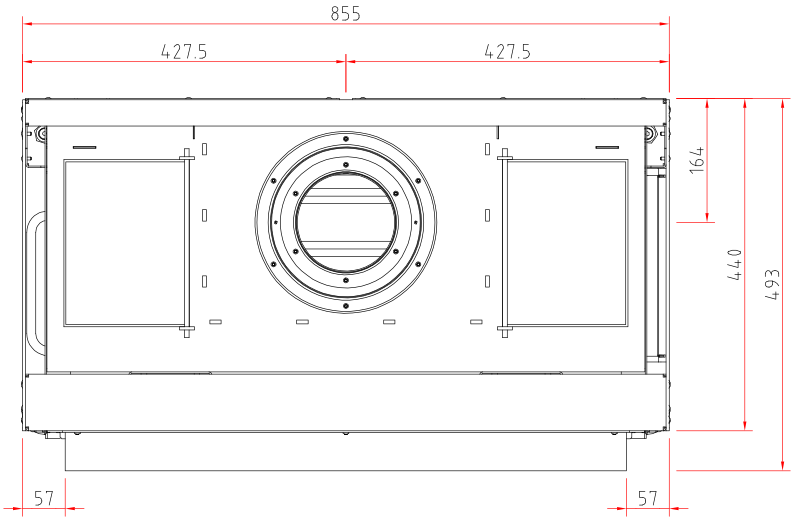

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 08/2020

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Lina G 73 (Erd-/Flüssiggas)
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	Lina G 73 (Erd-/Flüssiggas)
Energy efficiency class:	A
Direct heat output (kW)	7,8
Indirect heat output (kW):	–
Energy efficiency index (EEI):	89,1
Energy efficiency at nominal heat output (%):	81,0
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021


Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Gewerbepark 18 · 49143 Bissendorf · Phone +49 5402 7010-10 · Fax +49 5402 7010-70
www.camina-schmid.de · info@camina-schmid.de

ENERG Y IJA
енергия · ενεργεια IE IA

Camina Schmid **Lina G 73 (Erd-/Flüssiggas)**



A



7,8
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186