Ekko GO 45(45)57

Data sheet

Details

- 2-sided open combustion chamber
- 45(45)57 – Height 57 cm
- Includes detachable frame
- Hinged door, self-closing with SLS closure
- The outer shell is consisting of 60 mm thick heat storage material for a long-lasting heat release
- Suitable for multiple flue connections

Technical data

Fuel volume min.	3 kg
Fuel volume max.	7,5 kg
Efficiency	> 80 %
Combustion air requirement	56 m^3/h
Recommended length of logs	25 cm
Weight	245 kg
Weight with rotary chimney (wall and ceiling connection)	420 kg

Data for chimney sweep according to DIN EN 13384 (closed operation)

Ceramic flues in storage operation

Flue gas mass flow	20,3 g/s
Flue gas temperature at the chimney connection	429 °C
Required delivery pressure	12 Pa

Triple values with rotary flue

Flue gas mass flow	14,4 g/s
Flue gas temperature at the chimney connection	187 °C
Required delivery pressure	12 Pa

Ekko GO 45(45)57

Standard

Kristall front

Door hinge on left

Door hinge on right

Wood-burning

125 mm

Combustion air connector

Accessories

Adera

1. Federal Emissions Control Ordinance Stage 2

Made in Germany

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 09/2025

Ekko GO 45(45)57

Dimensional drawing

Front view, scale 1:20

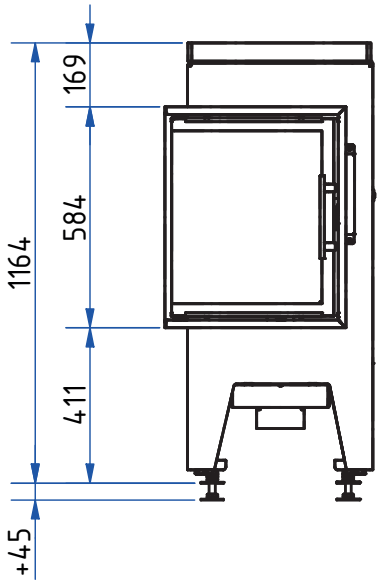

Side view, scale 1:20

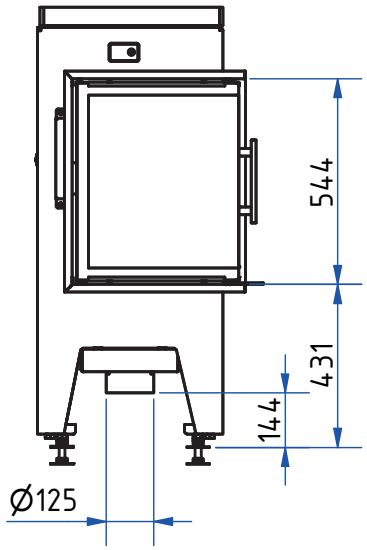

Top view, scale 1:10

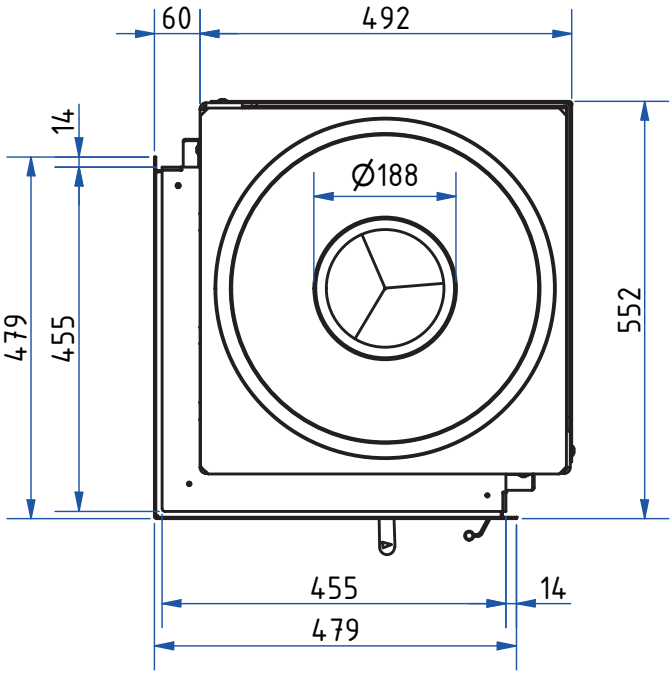

Side view with rotary chimney for wall and ceiling connection, scale 1:20

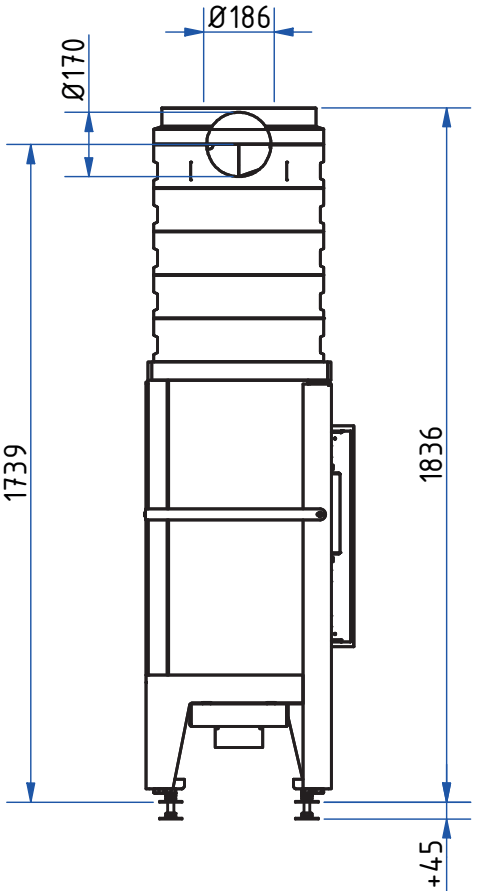

Abbildungen ähnlich. Alle Abbildungen und Zeichnungen sind urheberrechtlich geschützt. Verwertung oder Veröffentlichung, auch einzelner Details, nur mit unserer Genehmigung.
Farbliche und technische Änderungen durch Weiterentwicklungen sowie Irrtümer vorbehalten. Stand: 09/2025