

# Lina GO 4557

## Data sheet

### Details

- 1-sided open combustion chamber
- 4557 – Height 57 cm
- Includes detachable frame
- Hinged door, self-closing with SLS closure
- The outer shell is consisting of 60 mm thick heat storage material for a long-lasting heat release
- Suitable for multiple flue connections



Lina GO 4557

### Technical data

• Fuel volume min.	3 kg
• Fuel volume max.	7,5 kg
• Efficiency	>80%
• Combustion air requirement	56 m <sup>3</sup> /h
• Recommended length of logs	25 cm
• Weight	280 kg
• Weight with rotary chimney (wall and ceiling connection)	455 kg

**Data for chimney sweep** according to DIN EN 13384  
(closed operation)

### Ceramic flues in storage operation

• Flue gas mass flow	20,3 g/s
• Flue gas temperature at the chimney connection	429 °C
• Required delivery pressure	12 Pa

### Triple values with rotary flue

• Flue gas mass flow	14,4 g/s
• Flue gas temperature at the chimney connection	187 °C
• Required delivery pressure	12 Pa

### Standard



Kristall front



Door hinge on left



Door hinge on right



Wood-burning



Combustion air connector



Tunnel version

### Optional



Adera

### Accessories



Adera

1. Federal Emissions Control Ordinance Stage 2


Made in Germany




# Lina GO 4557

## Dimensional drawing


Front view, scale 1:20

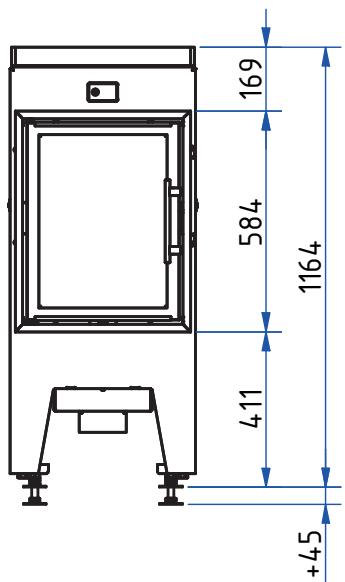

Side view, scale 1:20

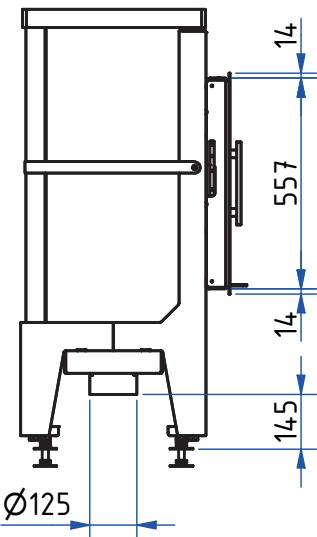

Top view, scale 1:10

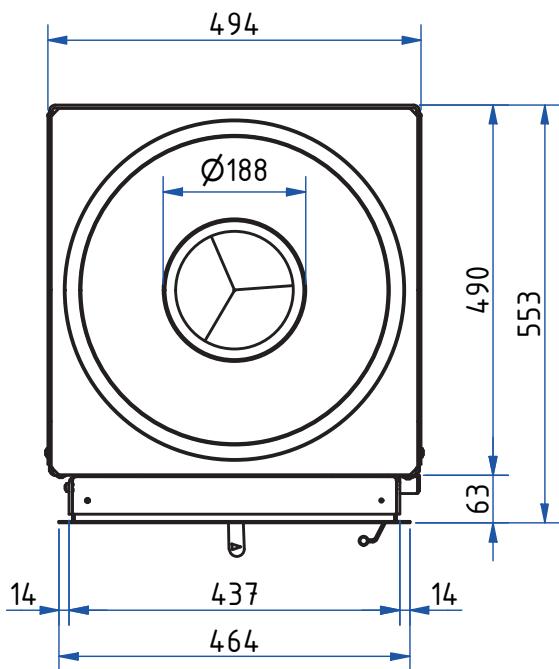

Side view with rotary chimney  
for wall and ceiling connection, scale 1:20

