# Profi GO 7 Front Profi K

## Data sheet

**Details**

- Masonry stove heat-kits based on the well-known Profi-Serie
- 1-sided open combustion chamber
- The outer shell is consisting of 60 mm thick heat storage material for a long-lasting heat release
- Manual combustion air supply
- Hinged door, self-closing
- With 4 flue gas connection options
- Suitable for multiple flue connections
- Integrated sensor seat for the SMR Multi Regulator above the firebox door

*Profi GO 7 – Front Profi K*

**Technical data**

| | |
|---|---|
| Fuel volume min. | 4 kg |
| Fuel volume max. | 10 kg |
| Efficiency | > 80 % |
| Combustion air requirement | 89,3 m³/h |
| Recommended length of logs | 33 cm |
| Weight | 380 kg |

**Data for chimney sweep** according to DIN EN 13384 (closed operation)

**Ceramic flues in storage operation**

| | |
|---|---|
| Flue gas mass flow | 27 g/s |
| Flue gas temperature at the chimney connection | 600 °C |
| Required delivery pressure | 8 Pa |

**Standard**

Door hinge on left · Door hinge on right · Double glazing · Wood-burning

**Optional**

Kristall front · Triple glazing (Standard with Profi K Kristall) · Combustion air connector (125 mm)

**Accessories**

SMR

A+ Energy efficiency class in accordance with (EU) 2015/1186

1. Federal Emissions Control Ordinance Stage 2

Made in Germany

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2018

# Profi GO 7 Front Profi K

## Dimensional drawing

**Front view, scale 1:20**

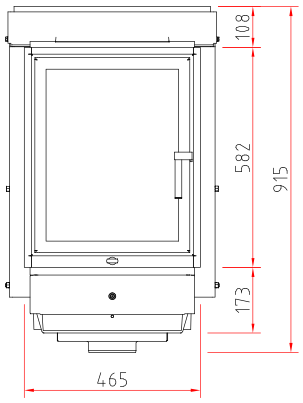


**Side view, scale 1:20**

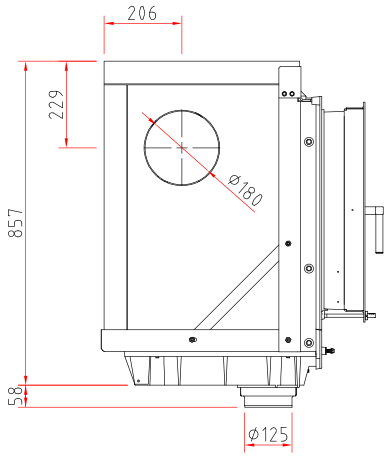


**Top view, scale 1:10**

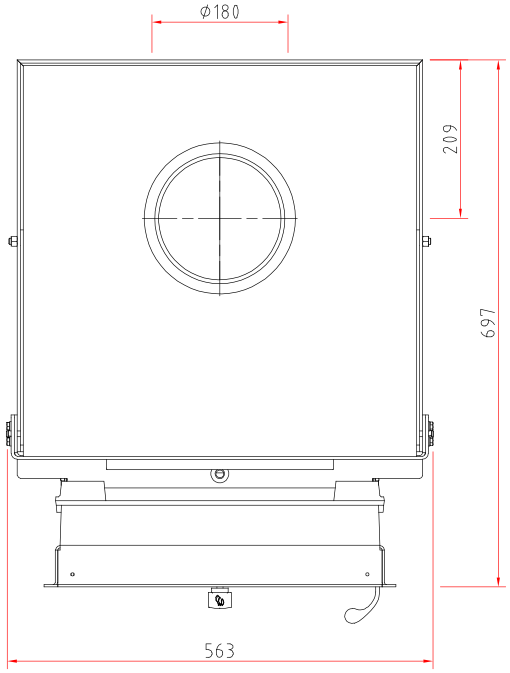


Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2018

# Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

| | **Profi GO 7** |
|---|---|
| **Supplier's name:** | Camina & Schmid Feuerdesign und Technik GmbH & Co. KG |
| **Supplier's model identifier:** | Profi GO 7 |
| **Energy efficiency class:** | A+ |
| **Direct heat output (kW)** | 7,0 |
| **Indirect heat output (kW):** | – |
| **Energy efficiency index (EEI):** | 111,8 |
| **Energy efficiency at nominal heat output (%):** | 84,0 |
| **Notes for specific precautions, installation or maintenance:** | Please note the reference in the assembly instructions and operating manuals! |

*There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021*

**Camina & Schmid Feuerdesign und Technik GmbH & Co. KG**
Gewerbepark 18 · 49143 Bissendorf · Phone +49 5402 7010-10 · Fax +49 5402 7010-70
www.camina-schmid.de · info@camina-schmid.de

ENERG Y IJA
енергия · ενεργεια IE IA

Camina Schmid **Profi GO 7**

**A+**

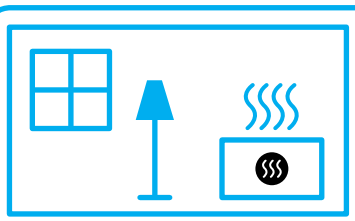

**7,0**
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

**2015/1186**