

Ronda GO 4557

Data sheet

Details

- 1-sided open combustion chamber
- 4557 – Height 57 cm
- Front radius: 300 mm
- Includes frame (non-detachable)
- Hinged door, self-closing with SLS closure
- The outer shell is consisting of 60 mm thick heat storage material for a long-lasting heat release
- Suitable for multiple flue connections



Ronda GO 4557

Technical data

• Fuel volume min.	3,5 kg
• Fuel volume max.	7,5 kg
• Efficiency	>80 %
• Combustion air requirement	46,9 m ³ /h
• Recommended length of logs	25 cm
• Weight	260 kg
• Weight with rotary chimney (wall and ceiling connection)	410 kg

Data for chimney sweep according to DIN EN 13384
(closed operation)

Ceramic flues in storage operation

• Flue gas mass flow	14,8 g/s
• Flue gas temperature at the chimney connection	450 °C
• Required delivery pressure	12 Pa

Triple values with rotary flue

• Flue gas mass flow	14,8 g/s
• Flue gas temperature at the chimney connection	210 °C
• Required delivery pressure	12 Pa

Standard



Kristall front



Door hinge on left



Door hinge on right



Wood-burning



125 mm
Combustion air connector



Adera

Accessories



1. Federal Emissions
Control Ordinance
Stage 2



Made in Germany



CERT




IEFA


Ronda GO 4557

Dimensional drawing


Front view with top outlet, scale 1:20

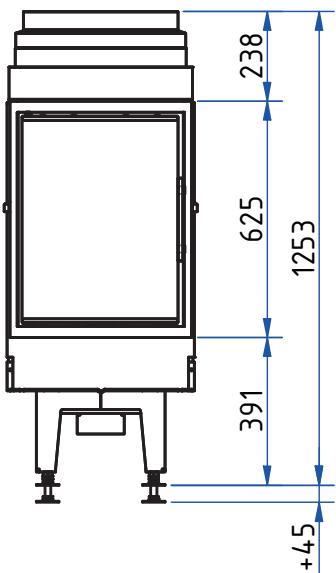

Side view with top outlet, scale 1:20

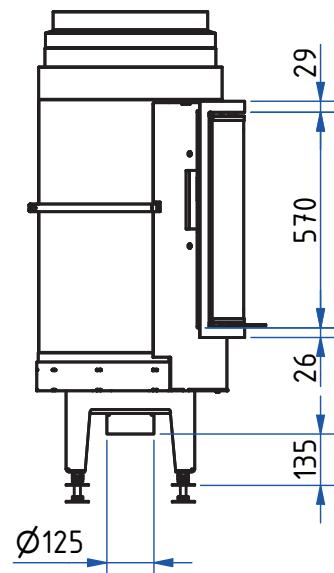

Top view with top outlet, scale 1:10

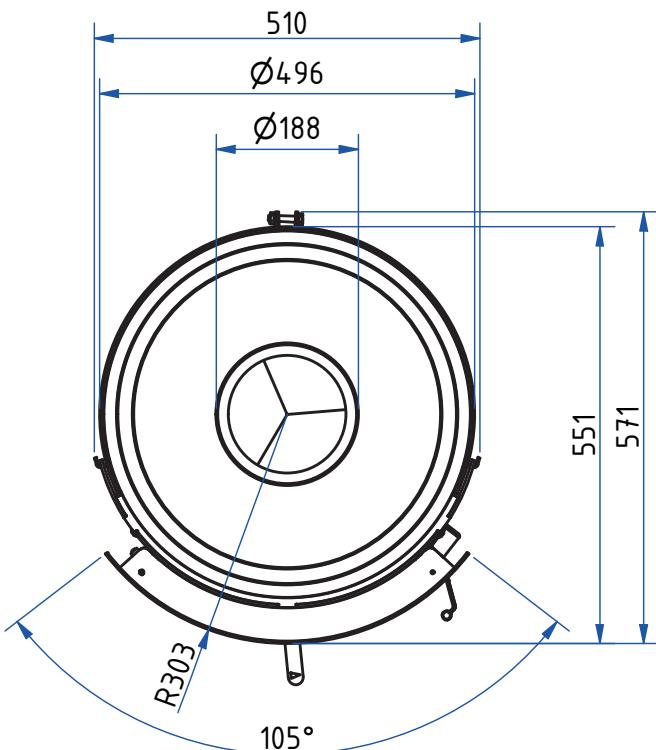

Side view with rotary chimney
for wall and ceiling connection, scale 1:20

