Ronda GO 4557

Data sheet

Details

- 1-sided open combustion chamber
- 4557 – Height 57 cm
- Front radius: 300 mm
- Includes frame (non-detachable)
- Hinged door, self-closing with SLS closure
- The outer shell is consisting of 60 mm thick heat storage material for a long-lasting heat release
- Suitable for multiple flue connections

Ronda GO 4557

Technical data

Fuel volume min.	3,5 kg
Fuel volume max.	7,5 kg
Efficiency	> 80 %
Combustion air requirement	46,9 m³/h
Recommended length of logs	25 cm
Weight	260 kg
Weight with rotary chimney (wall and ceiling connection)	410 kg

Data for chimney sweep according to DIN EN 13384 (closed operation)

Ceramic flues in storage operation

Flue gas mass flow	14,8 g/s
Flue gas temperature at the chimney connection	450 °C
Required delivery pressure	12 Pa

Triple values with rotary flue

Flue gas mass flow	14,8 g/s
Flue gas temperature at the chimney connection	210 °C
Required delivery pressure	12 Pa

Standard

Kristall front

Door hinge on left

Door hinge on right

Wood-burning

125 mm

Combustion air connector

Accessories

Adera

1. Federal Emissions Control Ordinance Stage 2

Made in Germany

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 09/2025

Ronda GO 4557

Dimensional drawing

Front view with top outlet, scale 1:20

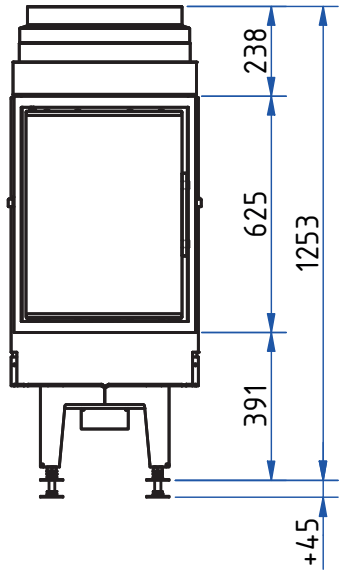

Side view with top outlet, scale 1:20

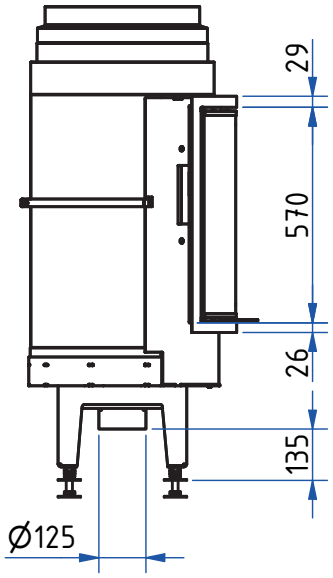

Top view with top outlet, scale 1:10

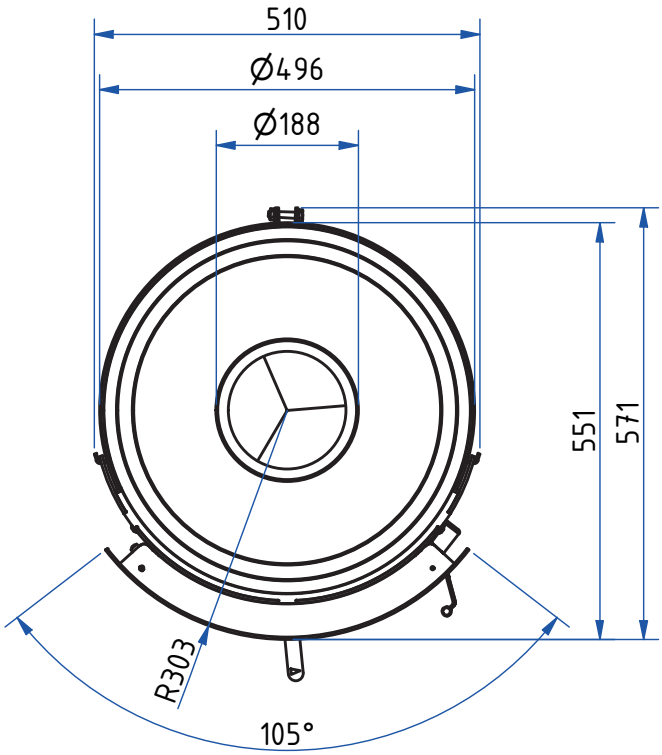

Side view with rotary chimney for wall and ceiling connection, scale 1:20

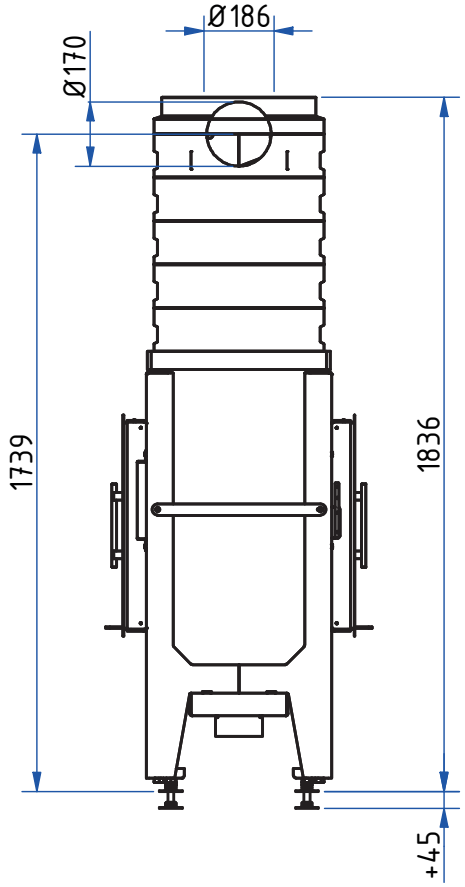

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 09/2025