

Change RF

Data sheet

Details

- Front panels available in different sizes and surfaces
- With upper, low-emission firing
- Door with triple glazing
- Suitable for multiple flue connections



Change RF

Technical data

Nominal heat output incl. NHK	8 kW
Thermal output range	3,1–8,4 kW
Efficiency	>80%
Insulation thickness (with wall that does not need to be protected) (based on SILCA®250KM)	60 mm
Combustion air connector	Ø125 mm
Recommend length of logs	33 cm
Weight including chamotte	140 kg
Heat distribution through the viewing window	20%
Heat distribution, convective output	80%
Combustion air requirement	25,9 m ³ /h

Standard



Door hinge on left



Door hinge on right



Triple glazed



Grate combustion

Data for chimney sweep according to DIN EN 13384
(closed operation)

Triple values with nominal heat output

Flue gas mass flow	6,0 g/s
Flue gas temperature downstream of the connecting surface	270 °C
Required delivery pressure	12 Pa

Triple values for calculating ceramic flues (wood fuel)

Firing power	12,5 kW
Flue gas mass flow	16,7 kW
Flue gas temperature upstream of the connecting surface	520 °C
Required delivery pressure at the flue gas connector	15 Pa
Combustion air requirement	39,8 m ³ /h



Energy efficiency class in accordance with (EU) 2015/1186



1. Federal Emissions Control Ordinance Stage 2



Made in Germany



CERT

Accredited by the Association of the French Woodworking Industry




EFA

Accredited by the European Association of the French Woodworking Industry


Change RF

Dimensional drawing


Front view, scale 1:20

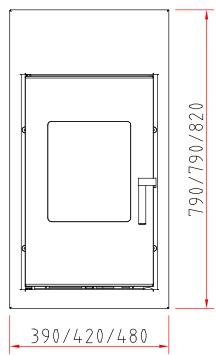

Side view, scale 1:20

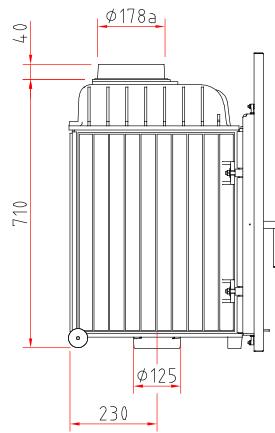

Top view, scale 1:10

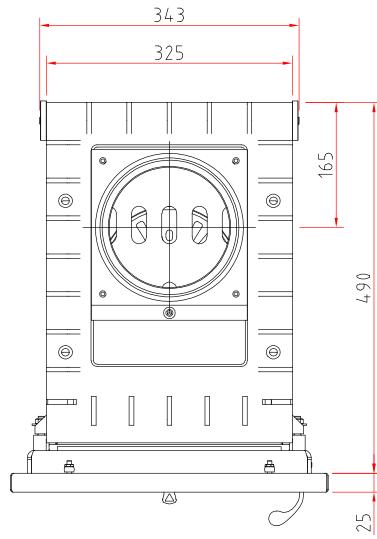

Product data sheet


Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Change RF
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	Change RF
Energy efficiency class:	A+
Direct heat output (kW):	8,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	110,5
Energy efficiency at nominal heat output (%):	83,1
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!


There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



Camina Schmid Change RF

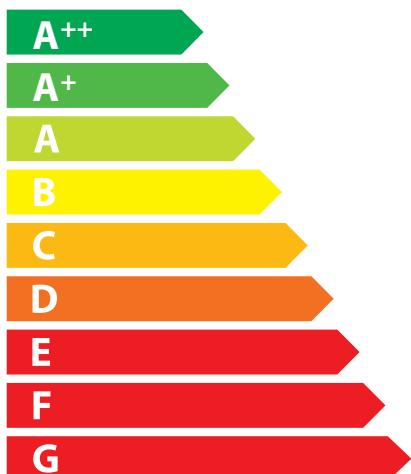

A⁺

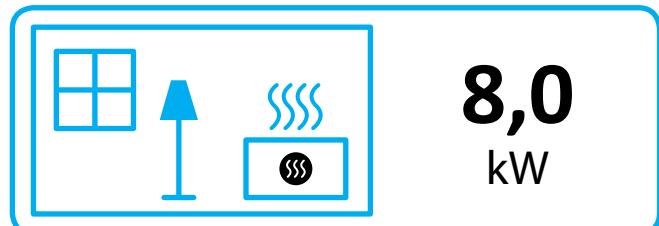

8,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186