Profi R 12
Data sheet

Profi R 12

Details
- Suitable for multiple flue connections
- Flue gas redirection for a clean combustion
- With 4 flue gas connection options
- Manual combustion air control
- Door front, round, single glass
- Frame radius: 440 mm

Technical data

Nominal heat output incl. NHK	12 kW
Thermal output range	4,3 – 12,7 kW
Efficiency	> 80 %
Insulation thickness (with wall that does not need to be protected) (based on SILCA® 250KM)	60 mm
Combustion air connector	Ø 150 mm
Recommend length of logs	42 cm
Weight including chamotte	300 kg
Heat distribution through the viewing window	20 %
Heat distribution, convective output	80 %
Combustion air requirement	46,6 m³/h

Data for chimney sweep according to DIN EN 13384 (closed operation)

Triple values with nominal heat output

Flue gas mass flow	11,3 g/s
Flue gas temperature downstream of the connecting surface	270 °C
Required delivery pressure	12 Pa

Triple values for calculating ceramic flues (wood fuel)

Firing power	15,1 kW
Flue gas mass flow	15,2 kW
Flue gas temperature upstream of the connecting surface	493 °C
Required delivery pressure at the flue gas connector	15 Pa
Combustion air requirement	35,3 m³/h

Standard

Door hinge on left · Door hinge on right · Wood-burning

Optional

External fuel-door · Combustion air connector

Accessories

SMR · Hydronic technology

A+ Energy efficiency class in accordance with (EU) 2015/1186

1. Federal Emissions Control Ordinance Stage 2

Made in Germany

EFA

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 01/2022

Profi R 12

Dimensional drawing

Front view, scale 1:20

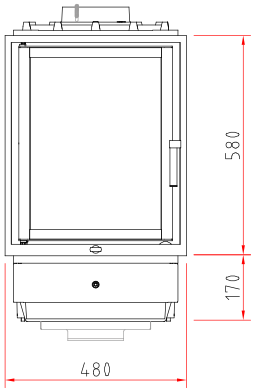

Side view, scale 1:20

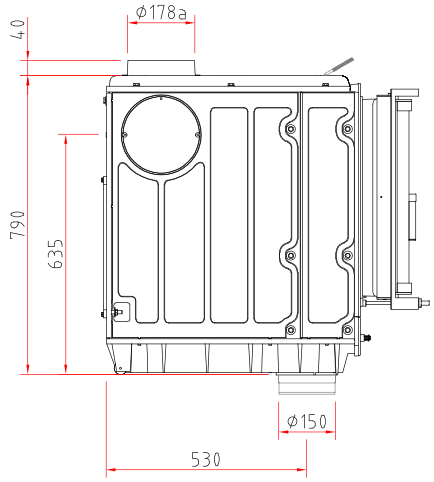

Top view, scale 1:10

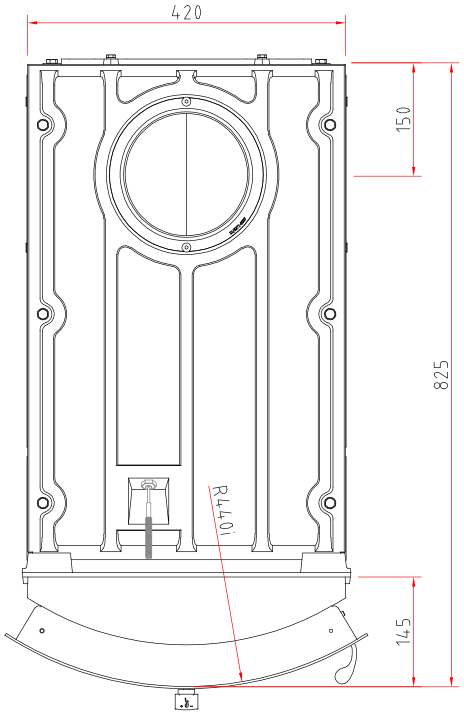

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2017

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Profi K/R/Plus 12, Profi 12, Concept 12
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	Profi K/R/Plus 12, Profi 12, Concept 12
Energy efficiency class:	A+
Direct heat output (kW)	12,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	109,5
Energy efficiency at nominal heat output (%):	82,4
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021

Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Gewerbepark 18 · 49143 Bissendorf · Phone +49 5402 7010-10 · Fax +49 5402 7010-70
www.camina-schmid.de · info@camina-schmid.de

ENERG Y IJA
енергия · ενεργεια IE IA

Camina Schmid **Profi K/R/Plus 12, Profi 12, Concept 12**

A+



12,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186