SD 11 E

Data sheet

Details

- Manual combustion air control
- Refractory lining with catalytic wavestone
- Inner lining (refractory lining) can be replaced through the fire door
- Suitable for multiple flue connections

Technical data

	Wood	Brown coal
Nominal heat output incl. NHK	11 kW	7 kW
Thermal output range	6 – 11,2 kW	3,1 – 7,2 kW
Efficiency	> 80 %	> 80 %
Insulation thickness (with wall that does not need to be protected) (based on SILCA® 250KM)	60 mm	60 mm
Combustion air connector	–	–
Recommend length of logs	50 cm	50 cm
Weight including chamotte	235 kg	235 kg
Heat distribution through the viewing window	10 %	10 %
Heat distribution, convective output	90 %	90 %
Combustion air requirement	40 m³/h	19,9 m³/h

Data for chimney sweep according to DIN EN 13384 (closed operation)

Triple values with nominal heat output

Flue gas mass flow	12,3 g/s	6,5 g/s
Flue gas temperature downstream of the connecting surface	201 °C	181 °C
Required delivery pressure	12 Pa	12 Pa

Triple values for calculating ceramic flues (wood fuel)

Firing power	15,6 kW	–
Flue gas mass flow	14,3 g/s	–
Flue gas temperature upstream of the connecting surface	510 °C	–
Required delivery pressure at the flue gas connector	15 Pa	–
Combustion air requirement	33,7 m³/h	–

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2018

SD 11 E – Door hinge on right

Standard

Door hinge on left

Door hinge on right

Double glazed

Combustion air connector

Mixed fuel

A+

Energy efficiency class in accordance with (EU) 2015/1186

1. Federal Emissions Control Ordinance Stage 2

Made in Germany

SD 11 E

Dimensional drawing

Front view, scale 1:20

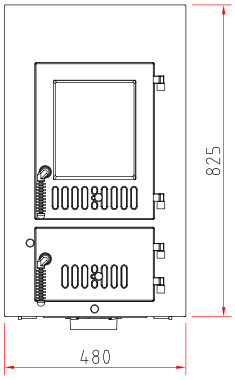

Side view, scale 1:20

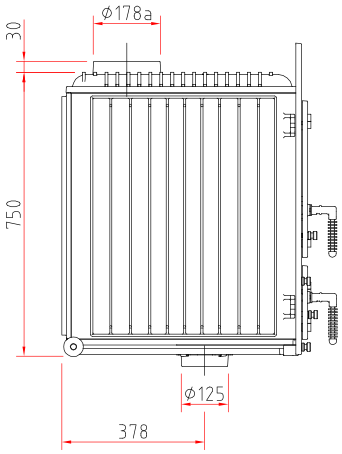

Top view, scale 1:10

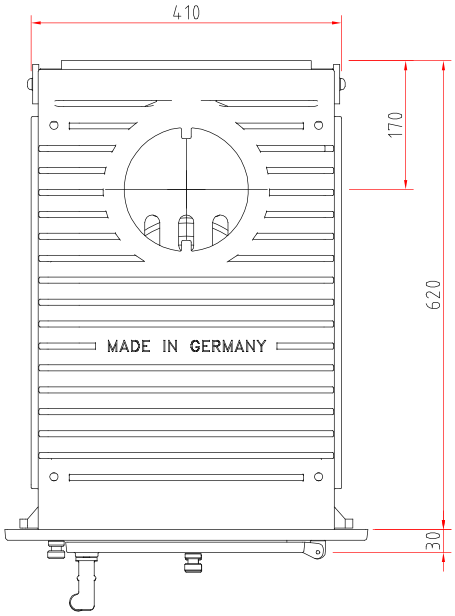

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2018

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	SD 11 E
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	SD 11 E
Energy efficiency class:	A+
Direct heat output (kW)	11,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	107,2
Energy efficiency at nominal heat output (%):	80,8
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021

Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Gewerbepark 18 · 49143 Bissendorf · Phone +49 5402 7010-10 · Fax +49 5402 7010-70
www.camina-schmid.de · info@camina-schmid.de

ENERG Y IJA
енергия · ενεργεια IE IA

Camina Schmid **SD 11 E**

A+

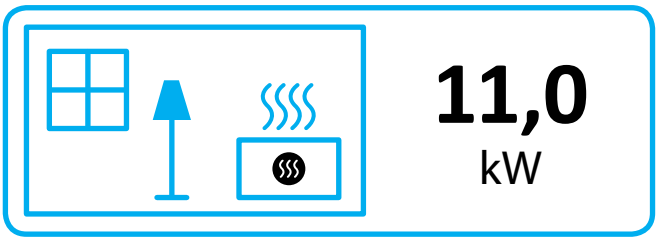

11,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186