

SH 9 T

Data sheet

Details

- Manual combustion air control
- Refractory lining with catalytic wavestone
- Inner lining (refractory lining) can be replaced through the fire door
- Suitable for multiple flue connections

Technical data

• Nominal heat output incl. NHK	9 kW
• Thermal output range	3,4 – 9,5 kW
• Efficiency	>80 %
• Insulation thickness (with wall that does not need to be protected) (based on SILCA® 250KM)	60 mm
• Combustion air connector	Ø125 mm
• Recommend length of logs	33 cm
• Weight including chamotte	230 kg
• Heat distribution through the viewing window	10 %
• Heat distribution, convective output	90 %
• Combustion air requirement	35 m ³ /h

Data for chimney sweep according to DIN EN 13384
(closed operation)

Triple values with nominal heat output

• Flue gas mass flow	8,9 g/s
• Flue gas temperature downstream of the connecting surface	270 °C
• Required delivery pressure	12 Pa

Triple values for calculating ceramic flues (wood fuel)

• Firing power	13,6 kW
• Flue gas mass flow	18,2 kW
• Flue gas temperature upstream of the connecting surface	529 °C
• Required delivery pressure at the flue gas connector	15 Pa
• Combustion air requirement	42,8 m ³ /h



SH 9 T

Standard



Door hinge on right



Triple glazed



Combustion air connector



Wood-burning

Accessories



SMR



Energy efficiency class in accordance with (EU) 2015/1186



1. Federal Emissions Control Ordinance Stage 2



Made in Germany



CERT




EFIA


SH 9 T

Dimensional drawing


Front view, scale 1:20

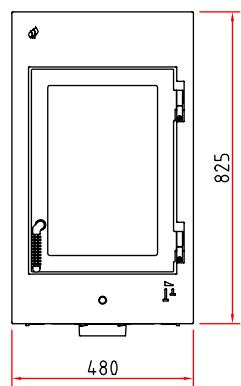

Side view, scale 1:20

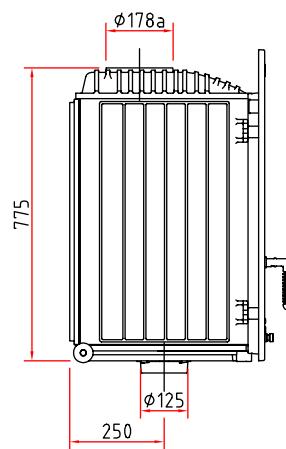

Top view, scale 1:10

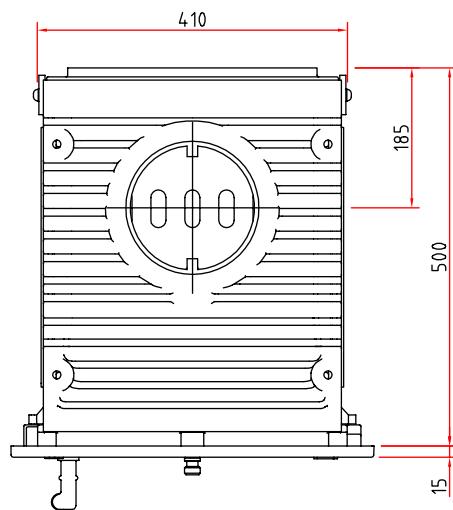

Product data sheet


Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Concept 9, SH 9 D, SH 9 G, SH 9 T
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	Concept 9, SH 9 D, SH 9 G, SH 9 T
Energy efficiency class:	A+
Direct heat output (kW):	9,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	109,2
Energy efficiency at nominal heat output (%):	82,2
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!


There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



Camina Schmid Concept 9, SH 9 D, SH 9 G, SH 9 T

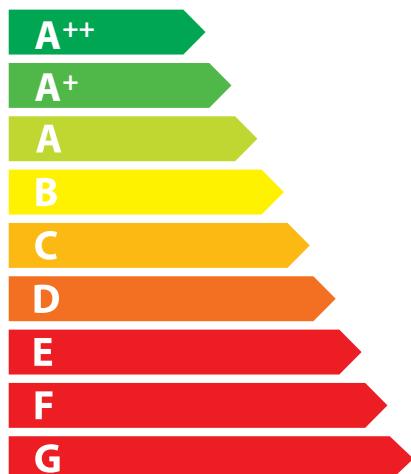

A⁺

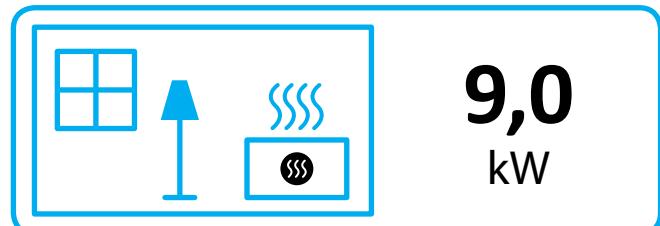

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186