

# Ekko L 67(34) h evo

## Data sheet

### Details

- Fireplace insert, open on two sides
- 67(34)51 – Height 51 cm  
67(34)57 – Height 57 cm
- Guillotine door, not supplied selfclosing from the factory
- Glass: 2-section
- Air module with Primary air shutdown
- Integrated flame correction for a straight flame
- Adjustable feet adjustable in height (manually/allen key)
- High-grade cast-iron dome, all parts can be moved, adjustable between 0 – 90°

### Standard

- Kristall front
- Combustion air connector 125 mm

### Optional

- Inner lining: chamotte white, anthracite and cast iron anthracite
- Selfclosing door
- Combustion air connector 150 mm
- Frames
- Frame system
- Support panel

### Accessories

- Hot water topmounted element
- External fuel-door
- Heat exchanger
- Top mounted heat exchanger
- Catalyst plates
- Auxiliary air mechanism
- Storage system SET 1
- Storage system SET 2
- Storage system SET 3
- Adera
- Safety controller
- Support frame
- Base frame



Ekko L 67(34)51 h evo with Chamotte white



Ekko L 67(34)51 h evo with Chamotte anthracite



Ekko L 67(34)51 h evo with BRS and Cast iron anthracite



Energy efficiency  
class in accordance  
with (EU) 2015/1186



1. Federal Emissions  
Control Ordinance  
Stage 2



There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 08/2025

# Ekko L 67(34) h evo

## Data sheet

### Technical data

|                                                                                                                            |                                                                         |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| • Nominal heat output                                                                                                      | 7,5 kW                                                                  |
| • Thermal output range                                                                                                     | 3,4 – 7,8 kW                                                            |
| • Efficiency                                                                                                               | >80 %                                                                   |
| • Insulation thickness (with a wall that does not need to be protected, based on TROL 2022, Reference insulation material) | 80 mm                                                                   |
| • Insulation thickness (Combustible components based on TROL 2022)                                                         | WDS 2 -<br>WDS 4 H                                                      |
| • Combustion air connector                                                                                                 | Ø 125 mm                                                                |
| • Type of combustion air supply                                                                                            | VL <sub>Room</sub> ,<br>VL <sub>External</sub>                          |
| • Recommended length of logs                                                                                               | 33 cm                                                                   |
| • Weight                                                                                                                   | 215 kg                                                                  |
| • Heat distribution through the viewing window                                                                             | 50 %                                                                    |
| • Heat distribution: convective output                                                                                     | 50 %                                                                    |
| • Recommended free cross-section <sup>1</sup>                                                                              | Supply air 840 cm <sup>2</sup><br>Recirculation air 700 cm <sup>2</sup> |

**Data for chimney sweep** according to DIN EN 13384 (closed operation)

### Triple values with nominal heat output

|                              |         |
|------------------------------|---------|
| • Flue gas mass flow         | 9,4 g/s |
| • Flue gas temperature       | 244 °C  |
| • Required delivery pressure | 12 Pa   |

### Triple values for calculating ceramic flues (wood fuel)

|                                                           |                        |
|-----------------------------------------------------------|------------------------|
| • Firing power                                            | 22,2 kW                |
| • Flue gas mass flow                                      | 15,9 g/s               |
| • Flue gas temperature upstream of the connecting surface | 378 °C                 |
| • Required delivery pressure at the flue gas connector    | 15 Pa                  |
| • Combustion air requirement <sup>2</sup>                 | 88,8 m <sup>3</sup> /h |
| • Recommended flue length <sup>3</sup>                    | 1,8 m                  |
| • Fuel conversion                                         | 5,3 kg/h               |

### Data for closed design

|                                              |                    |
|----------------------------------------------|--------------------|
| • Minimum heat-emitting surface <sup>4</sup> | 3,0 m <sup>2</sup> |
|----------------------------------------------|--------------------|

<sup>1</sup> The calculation was calculated according to TROL 2022 - Chapter 7.2.3.1 Supply and recirculation air cross sections. Free cross section in cm<sup>2</sup> for grid or breakthrough tile based on the heat output for air heating. Supply air grille 240 cm<sup>2</sup>/kW, recirculation air grille 200 cm<sup>2</sup>/kW. The calculated values may be exceeded or fallen short of by up to 20%.

<sup>2</sup> When connected directly to the outside air, combustion is not dependent on the direct ambient air.

<sup>3</sup> The information regarding flue lengths is a recommendation and based on the calculation in accordance with TROL 2022 chapter 15. The calculation is based on a medium-heavy design and a flue ratio of 360 cm<sup>2</sup>.

<sup>4</sup> Average value based on the storage time. Dependent on the material properties and the construction thickness. Mean specific heat distribution = approx. 500 W / m<sup>2</sup>

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 08/2025



Energy efficiency class in accordance with (EU) 2015/1186




1. Federal Emissions Control Ordinance Stage 2



# Ekko L 67(34) h evo

Side radiation area convective hot air

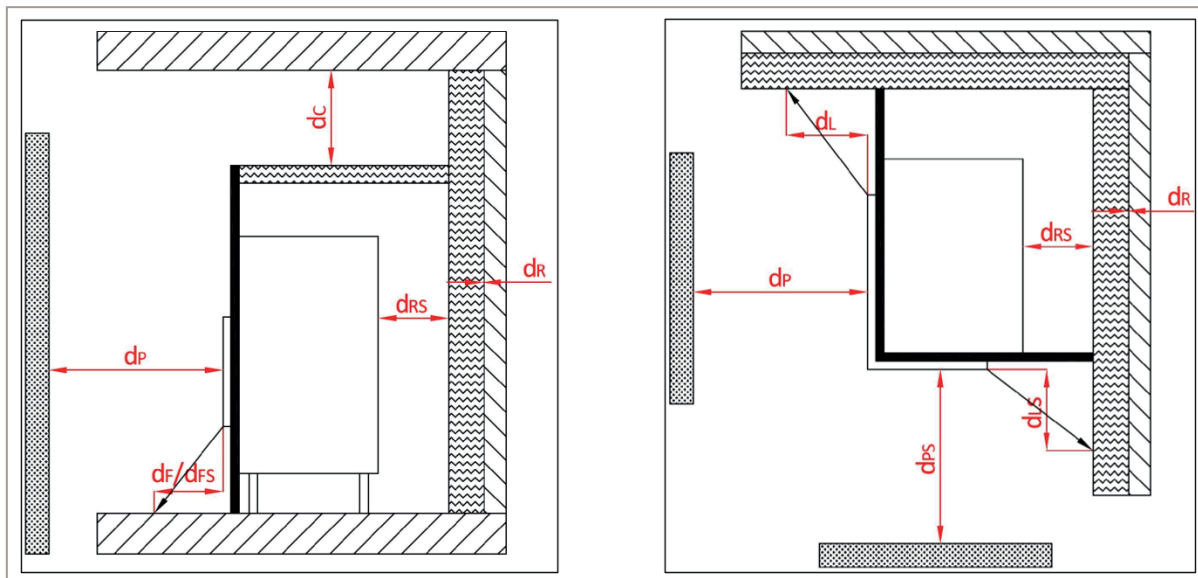


View from the side and from above

| Minimum distance to combustible materials:               | Abbr.    | Fireplace inserts:      |
|----------------------------------------------------------|----------|-------------------------|
|                                                          |          | Ekko L/R 67(34) s/h evo |
| ceiling                                                  | $d_c$    | > 750 mm                |
| rear and side (between the insulation and the test wall) | $d_r$    | 0 mm                    |
| rear and side (between the insulation and the insert)    | $d_{rs}$ | 70 mm                   |
| side radiation area front glass                          | $d_L$    | 530 mm                  |
| side radiation area side glass                           | $d_{LS}$ | 0 mm                    |
| to adjacent combustible materials front glass            | $d_p$    | 1100 mm                 |
| to adjacent combustible materials side glass             | $d_{PS}$ | 800 mm                  |
| distance on the floor to the front                       | $d_F$    | 0 mm                    |
| distance on the floor to the side                        | $d_{FS}$ | 0 mm                    |


# Ekko L 67(34)51 h evo

## Dimensional drawing


Front view, scale 1:20

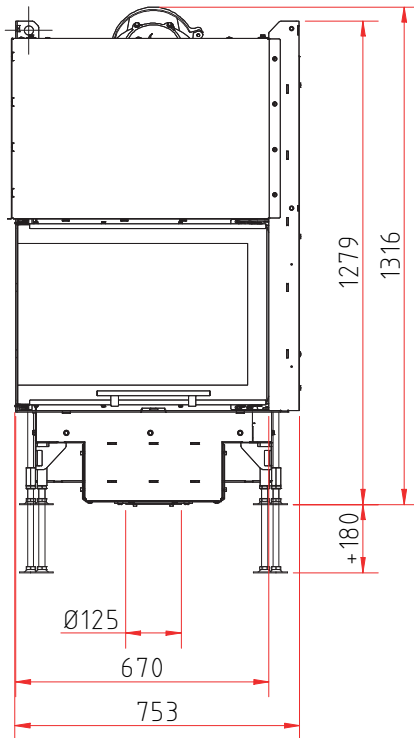

Side view, scale 1:20

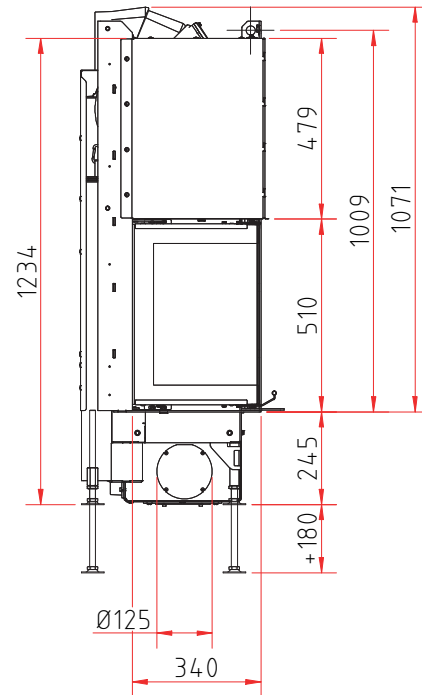


Top view, scale 1:10

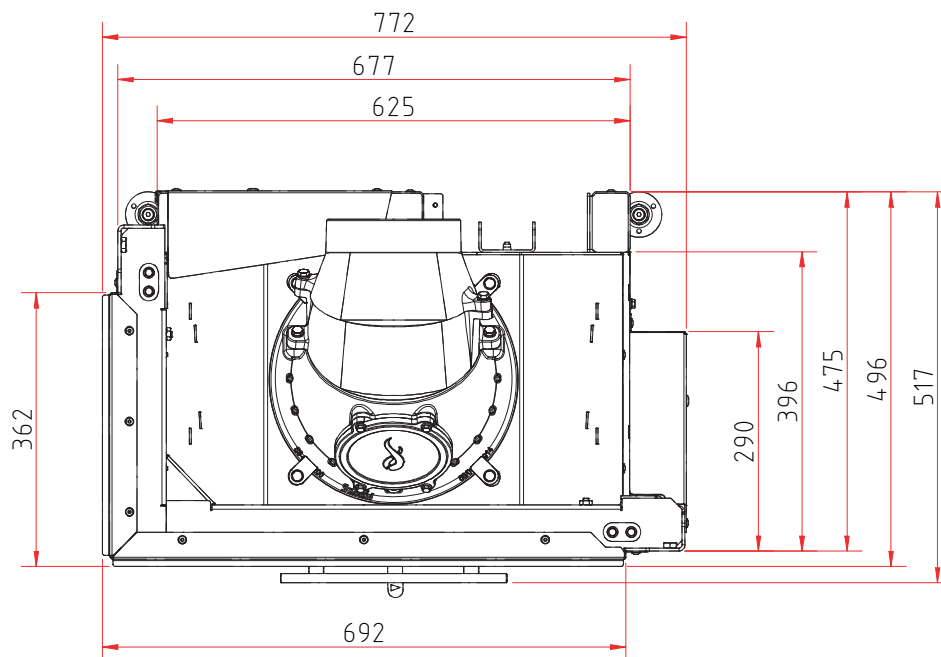


# Ekko L 67(34)51 h evo

## Dimensional drawing with frame system


Front view, scale 1:20

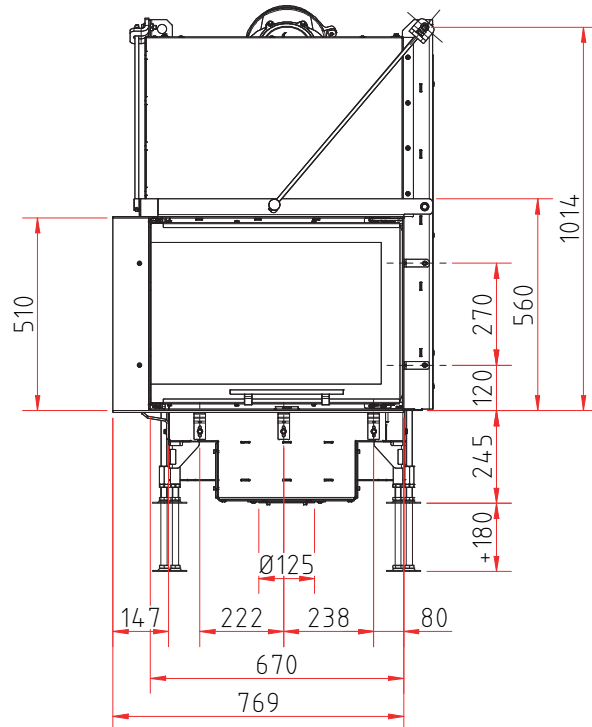

**Side view, scale 1:20**

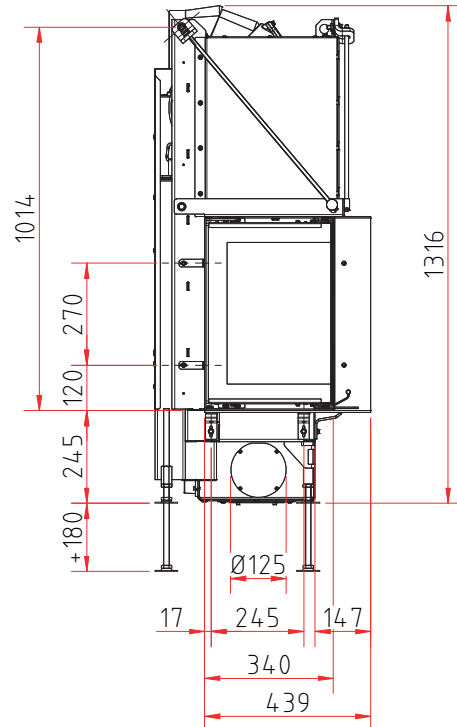


Top view, scale 1:10

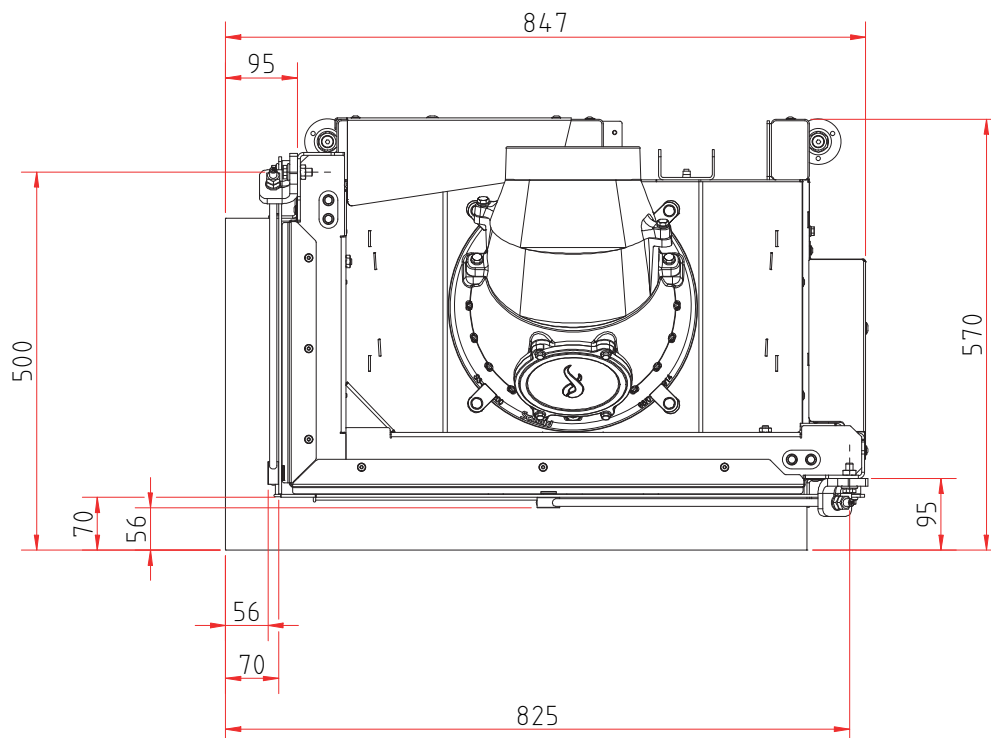


# Ekko L 67(34)57 h evo

## Dimensional drawing


Front view, scale 1:20

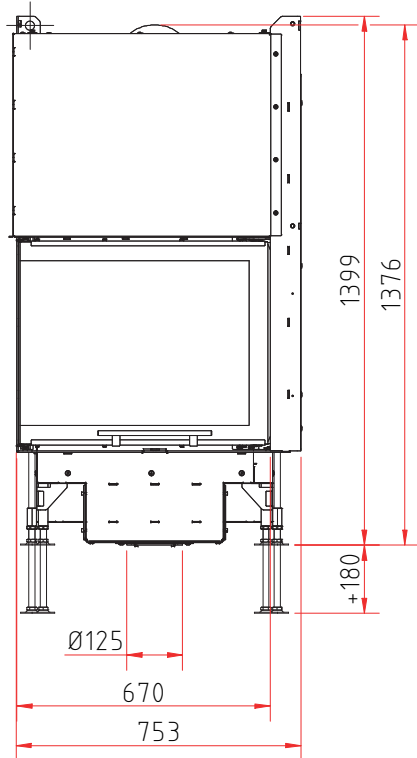

Side view, scale 1:20

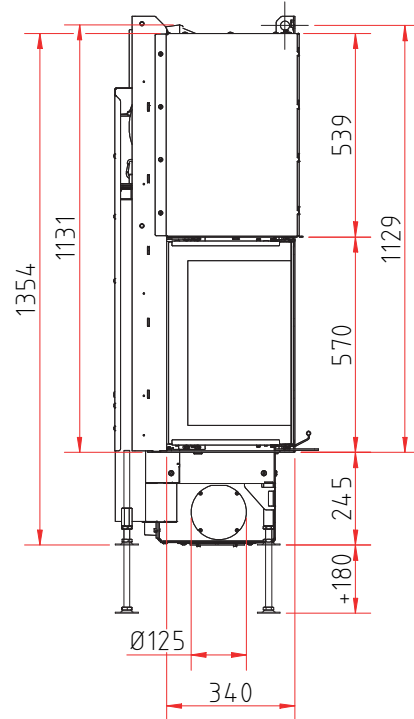


Top view, scale 1:10

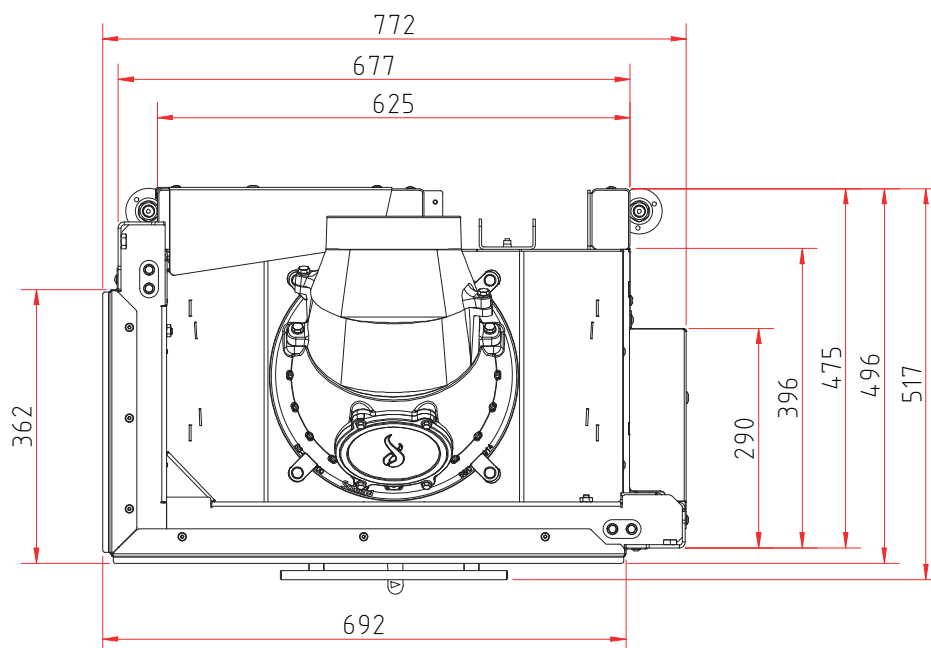

# Ekko L 67(34)57 h evo

Dimensional drawing with frame system

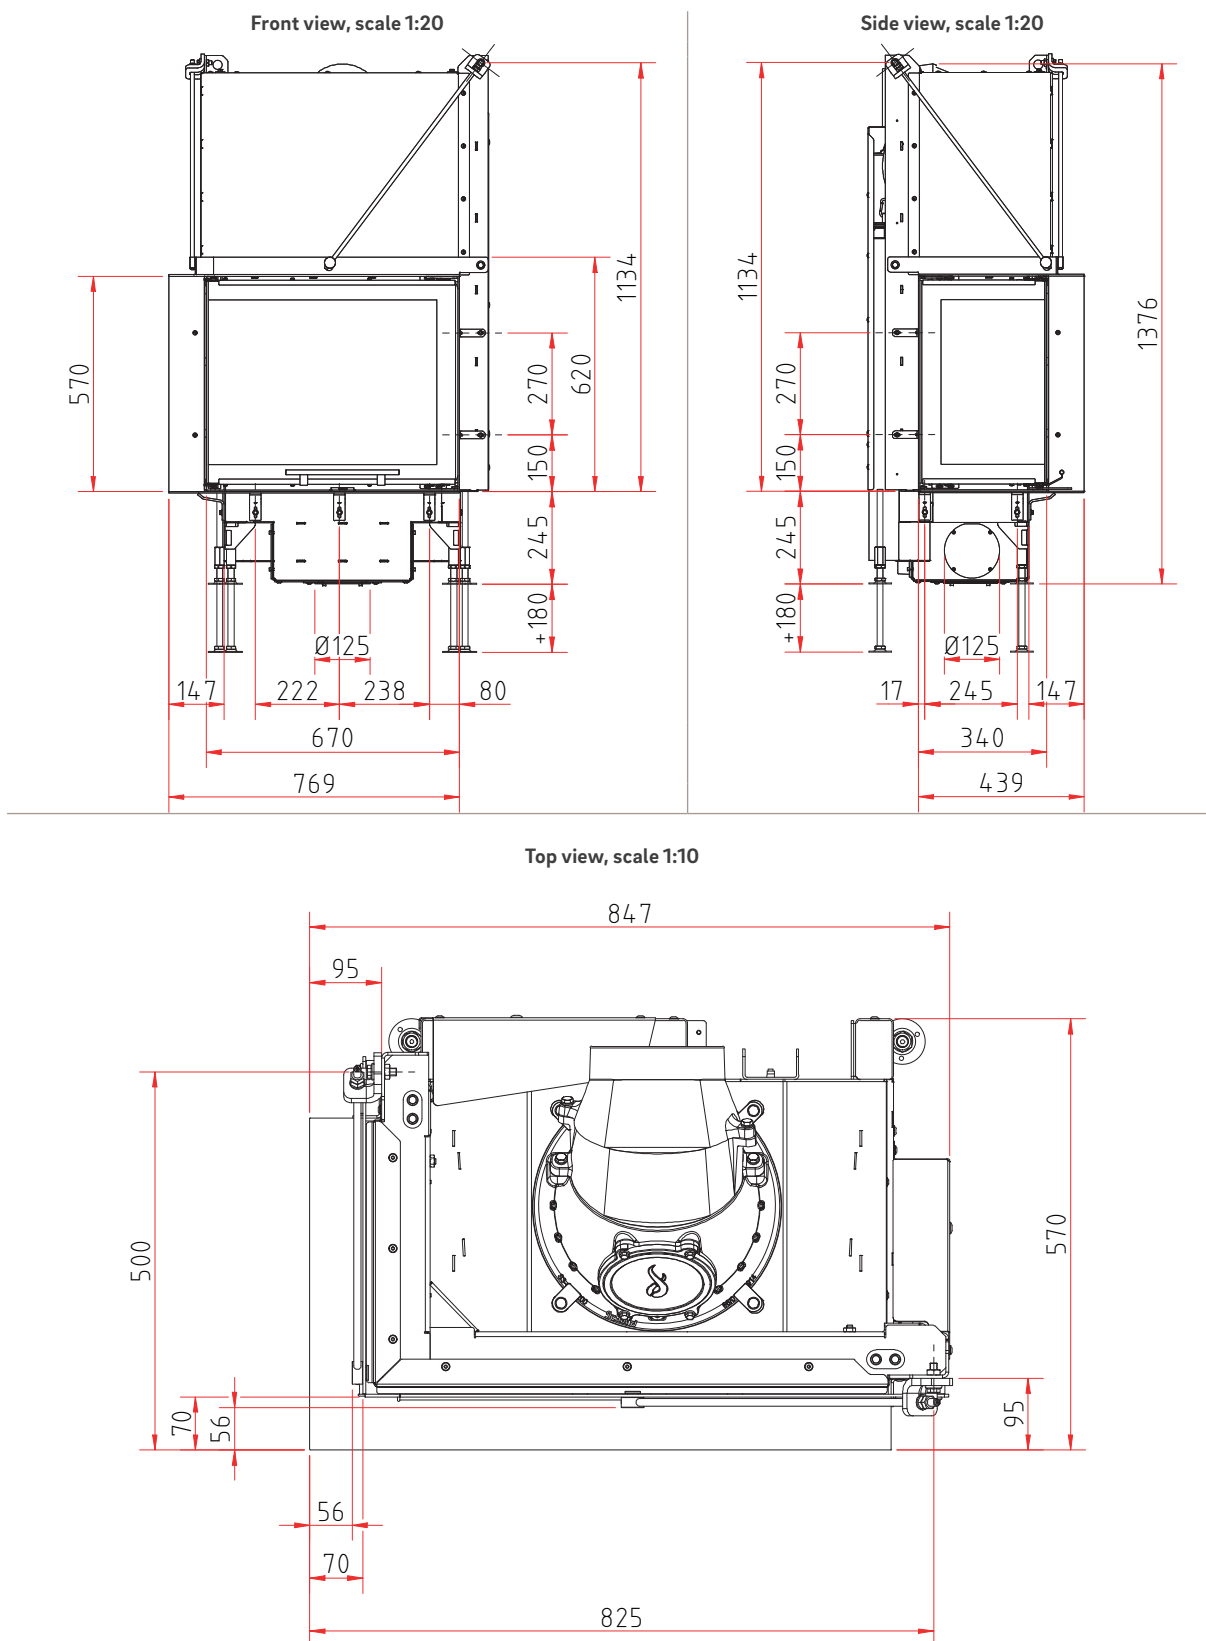

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2024

## Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

|                                                              | Ekko L/R 67(34) evo                                                           |
|--------------------------------------------------------------|-------------------------------------------------------------------------------|
| Supplier's name:                                             | Camina & Schmid Feuerdesign und Technik GmbH & Co. KG                         |
| Supplier's model identifier:                                 | Ekko L/R 67(34) evo                                                           |
| Energy efficiency class:                                     | A+                                                                            |
| Direct heat output (kW)                                      | 7,5                                                                           |
| Indirect heat output (kW):                                   | –                                                                             |
| Energy efficiency index (EEI):                               | 107,5                                                                         |
| Energy efficiency at nominal heat output (%):                | 81,0                                                                          |
| Notes for specific precautions, installation or maintenance: | Please note the reference in the assembly instructions and operating manuals! |

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 12/2024

|                                                                                         | Ekko L/R 67(34) evo |
|-----------------------------------------------------------------------------------------|---------------------|
| Room heat output (kW)                                                                   | 7,5                 |
| Partial load-thermal output (kW)                                                        | –                   |
| Partial load-room heat output (kW)                                                      | –                   |
| Efficiency partial load - thermal output (%)                                            | –                   |
| Room heating annual efficiency at nominal heat output                                   | 71                  |
| CO - Emissions (13% O <sub>2</sub> ) at nominal heat output (mg/m <sup>3</sup> )        | < 1250              |
| NOX - Emissions (13% O <sub>2</sub> ) at nominal heat output (mg/m <sup>3</sup> )       | < 200               |
| OGC - Emissions (13% O <sub>2</sub> ) at nominal heat output (mg/m <sup>3</sup> )       | < 120               |
| Particles - Emissions (13% O <sub>2</sub> ) at nominal heat output (mg/m <sup>3</sup> ) | < 40                |
| Required delivery pressure at nominal heat output (Pa)                                  | 12                  |
| Required delivery pressure at partial load-thermal output (Pa)                          | –                   |
| Chimney designation according chimney standard                                          | T 400               |
| Suitable for continuous burning operation (CON) or part-time operation (INT)            | INT                 |
| Minimum distance to combustible components based on TROL 2022                           | WDS 2 - WDS 4H      |
| Maximum carrying capacity by chimney (kg)                                               | 100                 |

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 12/2024







ENERG  
енергия · ενέργεια



Camina  Schmid Ekko L/R 67(34) evo

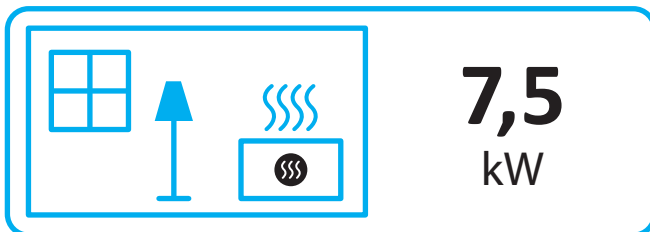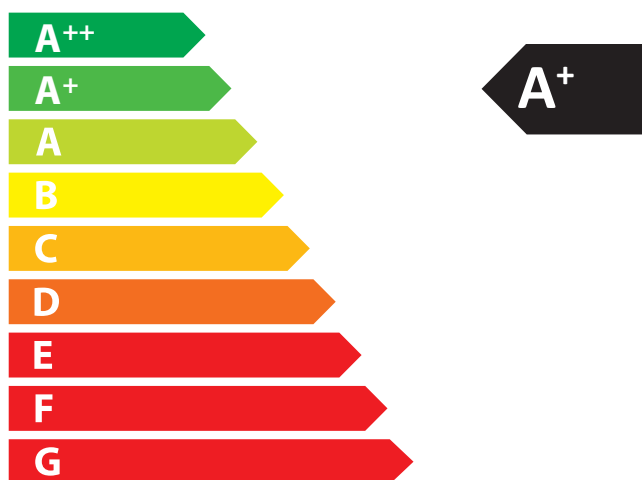

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186