Ronda 67 h

Data sheet

Details

- Fireplace insert, open on one side, Front: round
- 6745 – Height 45 cm
  6751 – Height 51 cm
  6757 – Height 57 cm
- Glass radius: 300 mm
- Optional: Self-closing door
- Adjustable lower air washing
- Standard fire box inner lining: smooth beige chamotte
- High-grade cast-iron dome, all parts can be moved, adjustable between 0 – 90°
- Overall height can be simply and quickly adjusted
- Easy to dismantle for transport

Ronda 67 with guillotine front

Technical data

Nominal heat output	9 kW
Thermal output range	3,3 – 8,7 kW
Efficiency	>78 %
Insulation thickness (with wall that does not need to be protected) (based on SILCA® 250KM)	60 mm
Combustion air connector	Ø 125 mm
Recommend length of logs	33 cm
Weight	245 – 265 kg
Heat distribution through the viewing window	35 %
Heat distribution, convective output	65 %

Data for chimney sweep according to DIN EN 13384 (closed operation)

Triple values with nominal heat output

Flue gas mass flow	5,9 g/s
Flue gas temperature	340 °C
Required delivery pressure	12 Pa

Triple values for calculating ceramic flues (wood fuel)

Firing power	–
Flue gas mass flow	–
Flue gas temperature upstream of the connecting surface	–
Required delivery pressure at the flue gas connector	–
Combustion air requirement	–
Recommended flue length[1]	1,7 m

Data for closed design

Minimum heat-emitting surface[2]	4,2 m²

[1] The information regarding flue lengths is a recommendation and based on the calculation in accordance with TROL 2022 chapter 15. The calculation is based on a medium-heavy design and a flue ratio of 360 cm².

[2] Average value based on the storage time. Dependent on the material properties and the construction thickness. Mean specific heat distribution = approx. 500 W / m²

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 01/2024

Standard

- Anthracite front
- Guillotine door
- Combustion air connector (125 mm)

Optional

- External fuel-door
- Combustion air connector (150 mm)

Accessories

- Heat exchanger
- Top mounted heat exchanger
- Hot air top-mounted element
- Hot water top-mounted element R
- SMR

Energy efficiency class in accordance with (EU) 2015/1186

1. Federal Emissions Control Ordinance Stage 2

Made in Germany

Ronda 67 h

Dimensional drawing

Front view, scale 1:20

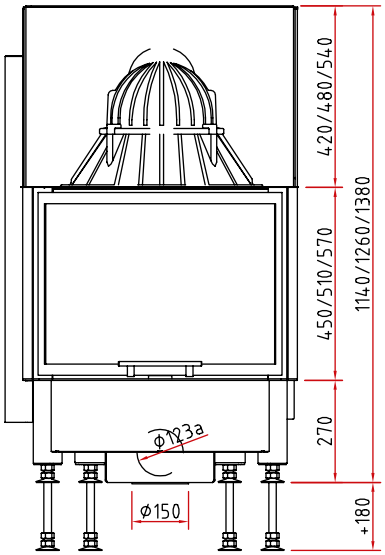

Side view, scale 1:20

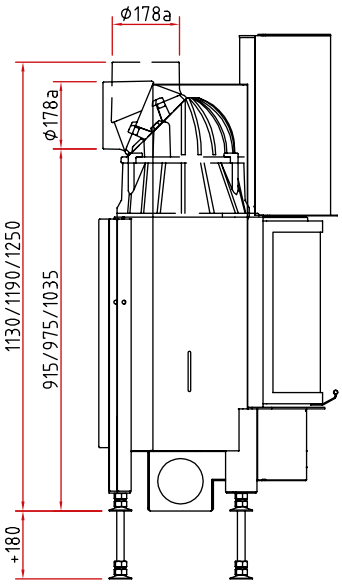

Top view, scale 1:10

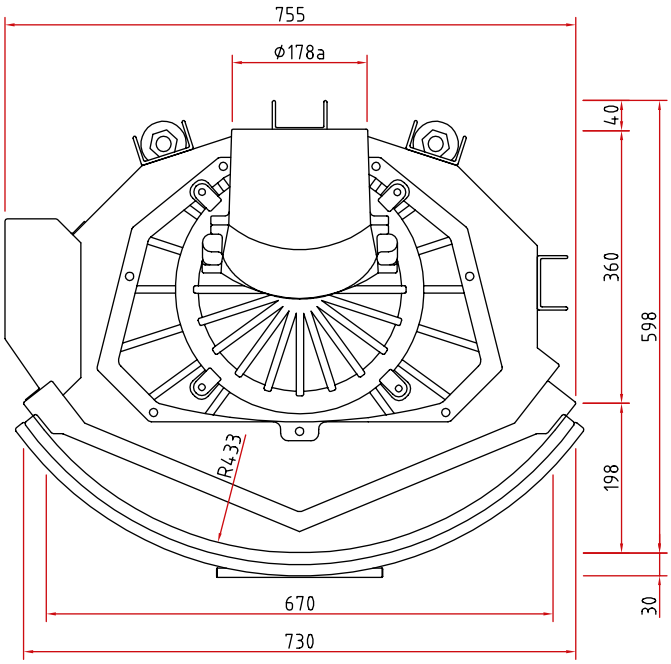

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2017

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	Ronda 67 s/h
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	Ronda 67 s/h
Energy efficiency class:	A
Direct heat output (kW)	9,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	105,0
Energy efficiency at nominal heat output (%):	79,3
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021

Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Gewerbepark 18 · 49143 Bissendorf · Phone +49 5402 7010-10 · Fax +49 5402 7010-70
www.camina-schmid.de · info@camina-schmid.de

ENERG
енергия · ενεργεια
Y IJA IE IA

Camina Schmid **Ronda 67 s/h**

A

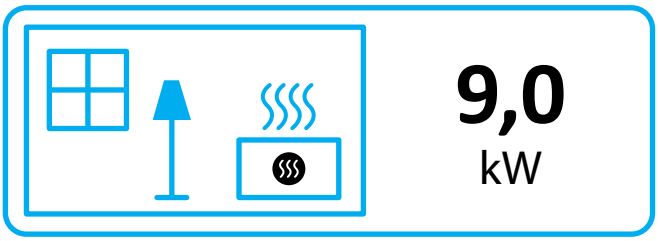

9,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186