

Fireplace cassette inserts

Data sheet

Details

- Ideal as replacement models for over 100 different models from well-known manufacturers
- Environmentally-friendly combustion with efficient flue gas guidance
- Higher efficiency due to power-free automatic control
- Comfortable installation due to height-adjustable feet
- Seven different models

Model selection



Open on 1 side



Open on 2 side



Open on 3 side



Panorama



Round glass



Curved arch



Tunnel version

Triple values to calculate the chimney in accordance with DIN EN 13384-1 and DIN EN 13384-2

HK 65

Nominal heat output	6.5 kW
Max. loading capacity	1.5 kg
Flue gas mass flow	6.8 g/s
Flue gas temperature	282 °C
Minimum delivery pressure	12 Pa

HK 80

Nominal heat output	8 kW
Max. loading capacity	1.8 kg
Flue gas mass flow	8.6 g/s
Flue gas temperature	269 °C
Minimum delivery pressure	12 Pa

HK 100

Nominal heat output	10 kW
Max. loading capacity	2.2 kg
Flue gas mass flow	10.4 g/s
Flue gas temperature	256 °C
Minimum delivery pressure	12 Pa

HK 125

Nominal heat output	12.5 kW
Max. loading capacity	2.8 kg
Flue gas mass flow	13.2 g/s
Flue gas temperature	271 °C
Minimum delivery pressure	12 Pa

HK 150

Nominal heat output	15 kW
Max. loading capacity	3.3 kg
Flue gas mass flow	16.0 g/s
Flue gas temperature	286 °C
Minimum delivery pressure	12 Pa



Energy efficiency
class in accordance
with (EU) 2015/1186



There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 65
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 65
Energy efficiency class:	A+
Direct heat output (kW)	6,5
Indirect heat output (kW):	–
Energy efficiency index (EEI):	109
Energy efficiency at nominal heat output (%):	81,4
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!



There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid HK 65

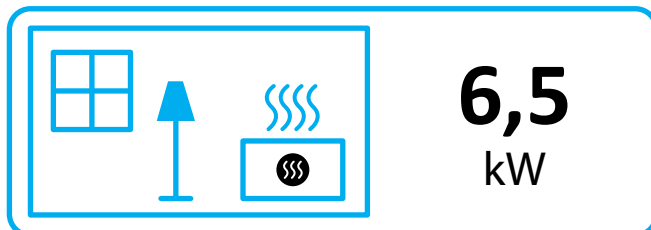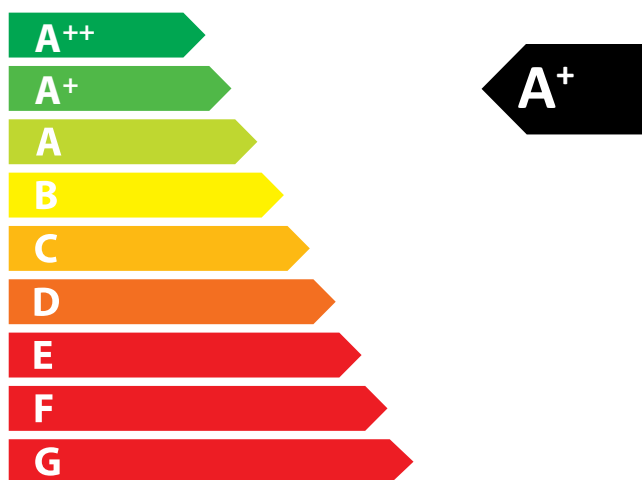

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 80
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 80
Energy efficiency class:	A+
Direct heat output (kW)	8,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	110,6
Energy efficiency at nominal heat output (%):	82,5
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021




ENERG
енергия · ενέργεια



Camina  Schmid HK 80



A⁺



8,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 100
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 100
Energy efficiency class:	A+
Direct heat output (kW)	10,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	112,1
Energy efficiency at nominal heat output (%):	83,5
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021




ENERG
енергия · ενέργεια



Camina  Schmid HK 100



A⁺



10,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 125
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 125
Energy efficiency class:	A+
Direct heat output (kW)	12,5
Indirect heat output (kW):	–
Energy efficiency index (EEI):	110
Energy efficiency at nominal heat output (%):	82,1
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021




ENERG
енергия · ενέργεια



Camina  Schmid HK 125



A⁺



12,5
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 150
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 150
Energy efficiency class:	A+
Direct heat output (kW)	15,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	108
Energy efficiency at nominal heat output (%):	80,6
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021




ENERG
енергия · ενέργεια



Camina  Schmid HK 150



A⁺



15,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186