

S12 Short

Data sheet



Figure: S12 Short with design concrete
Surface finish:
Camina silicate paint

Figure: S12 Short | Surface finish: Camina silicate paint


Standard	Total weight	Optional	Accessories	Storage concrete	Fireplace insert
 Guillotine door	 approx. 421 kg		 SMR	 Spark protection plate	 Storage concrete
 Front Kristall				 Design concrete	 Ekko U 45(34)51 h Nominal heat output: 4 kW Flue gas connector: Ø 160 mm
 Rear-ventilated back wall					 Energy efficiency class as per (EU) 2015/1186

More information at
www.camina-schmid.de


S12 Short

Dimensional drawing


Front view, scale 1:20

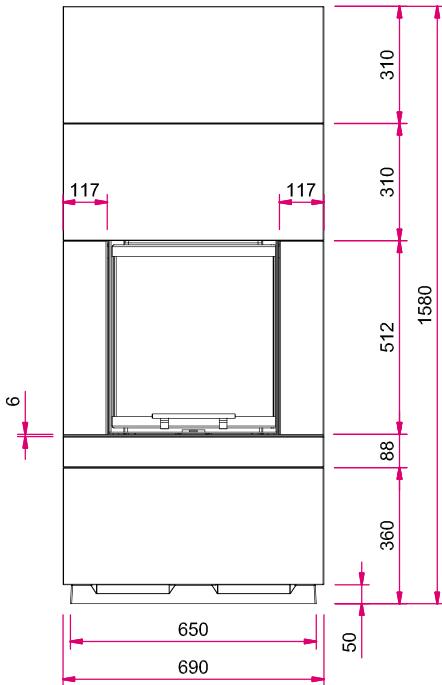

Left side view scale 1:20

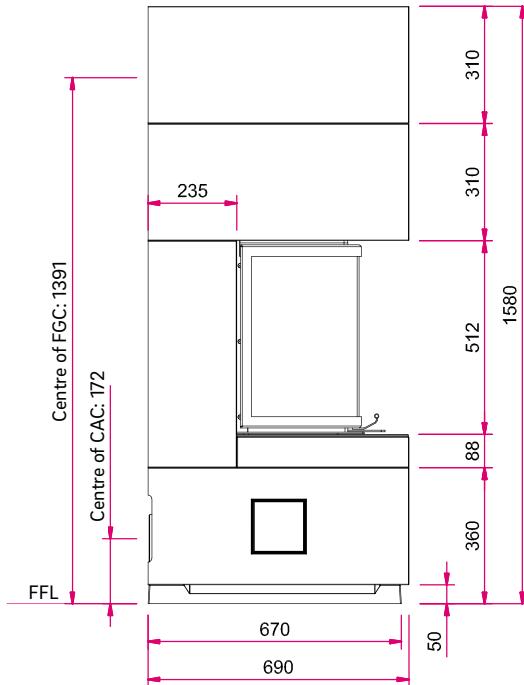

Top view, scale 1:20

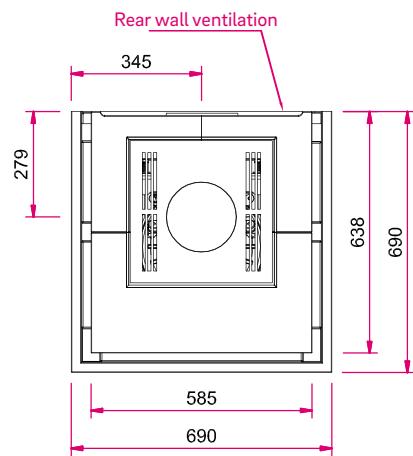

Note on left side view scale 1:20: AS (FGC): Flue gas connector, VLS (CAC): Combustion air connector, OKFF (FFL): Finished floor level

Please note the information on **optional accessories** in our price list.

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2019

S12 Short natural stone bench

Data sheet




Figure: S12 Short with natural stone bench (with overhang) | Surface finish: Camina silicate paint

Standard	Total weight	Optional	Accessories	Storage concrete	Fireplace insert
 Guillotine door	 approx. 421kg		 SMR	 Blanco Carrara	 Grigio matt
 Front Kristall			 Spark protection plate	 Mocca Creme	 Nero
 Rear-ventilated back wall				 Nero matt	Ekko U 45(34)51h Nominal heat output: 4 kW Flue gas connector: Ø 160 mm
					 Energy efficiency class as per (EU) 2015/1186
					More information at www.camina-schmid.de


S12 Short natural stone bench

Dimensional drawing


Front view, scale 1:20

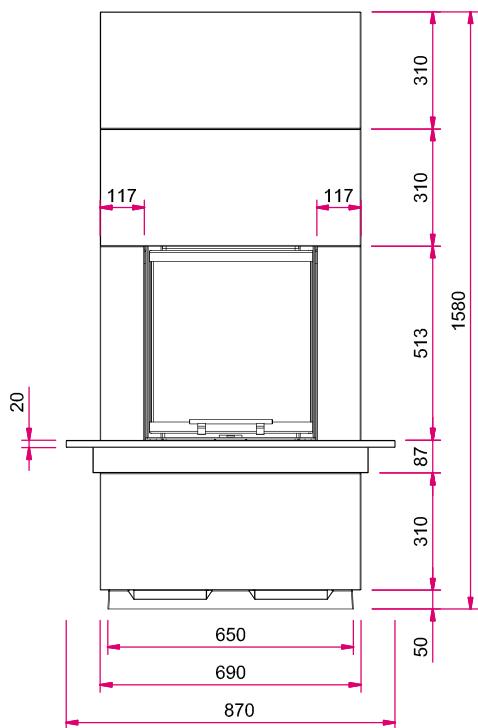

Left side view scale 1:20

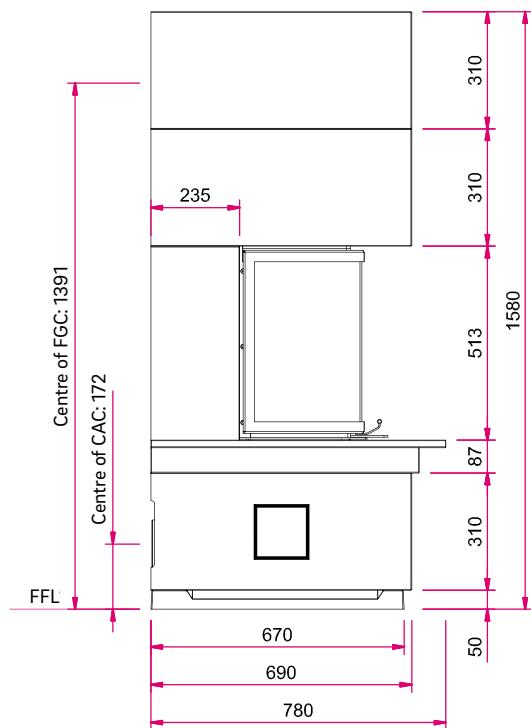

Top view, scale 1:20

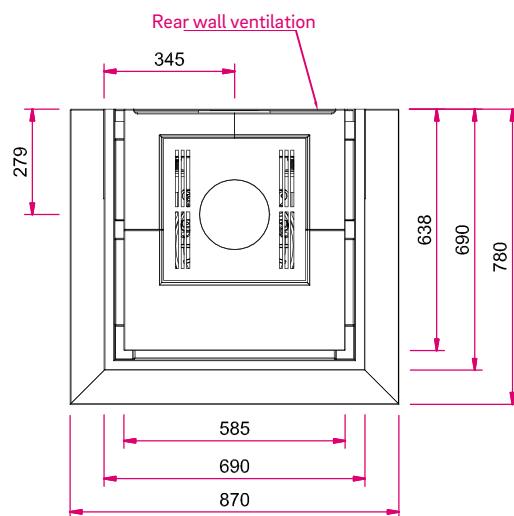

Note on left side view scale 1:20: AS (FGC): Flue gas connector, VLS (CAC): Combustion air connector, OKFF (FFL): Finished floor level

Please note the information on **optional accessories** in our price list.

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2019

S12 Short 2nd base

Data sheet




Figure: S12 Short with 2nd base, H 310 mm | Surface finish: Camina silicate paint

Standard	Total weight	Optional	Accessories	Storage concrete	Fireplace insert
 base, H 310 mm	 approx. 487 kg		 SMR  Spark protection plate	 Storage concrete  Design concrete	 <p>Ekko U 45(34)51 h Nominal heat output: 4 kW Flue gas connector: Ø 160 mm</p>
 Guillotine door					 Energy efficiency class as per (EU) 2015/1186
 Front Kristall					More information at www.camina-schmid.de
 Rear-ventilated back wall					


S12 Short 2nd base

Dimensional drawing


Front view, scale 1:20

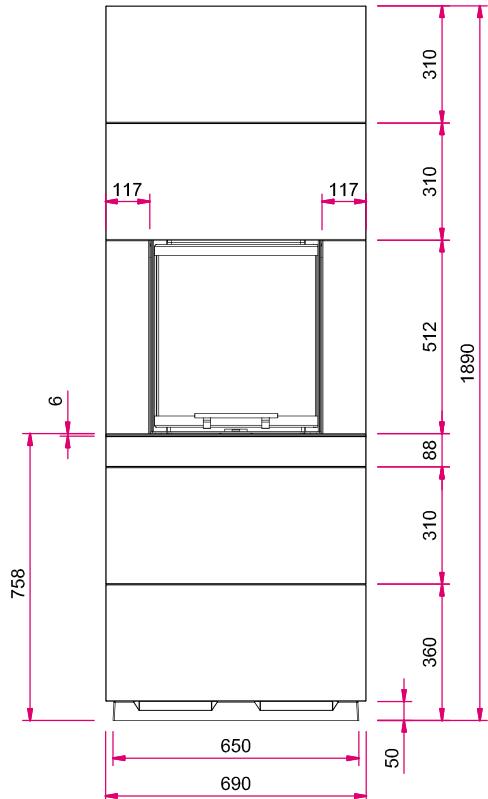

Left side view scale 1:20

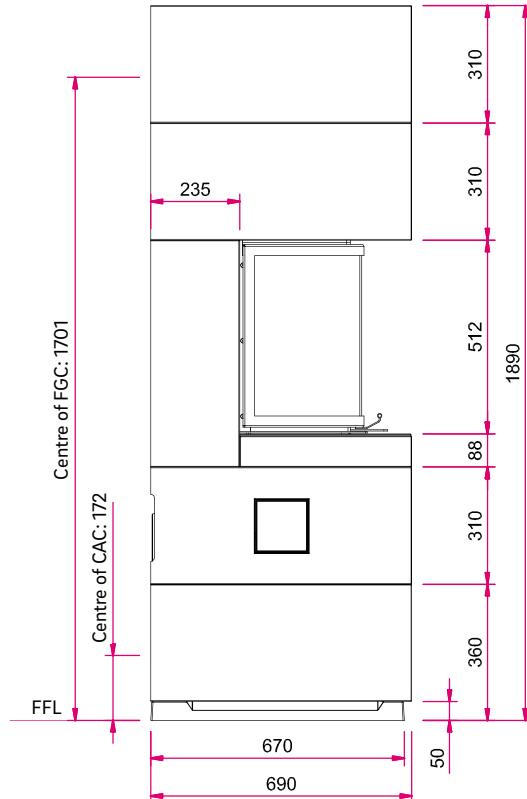

Top view, scale 1:20

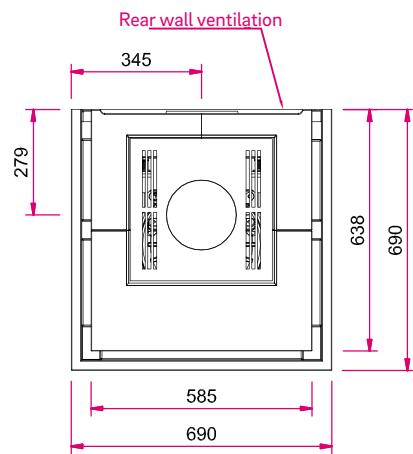

Note on left side view scale 1:20: AS (FGC): Flue gas connector, VLS (CAC): Combustion air connector, OKFF (FFL): Finished floor level

Please note the information on **optional accessories** in our price list.

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2019

S12 Short 2nd Base and natural stone bench

Data sheet

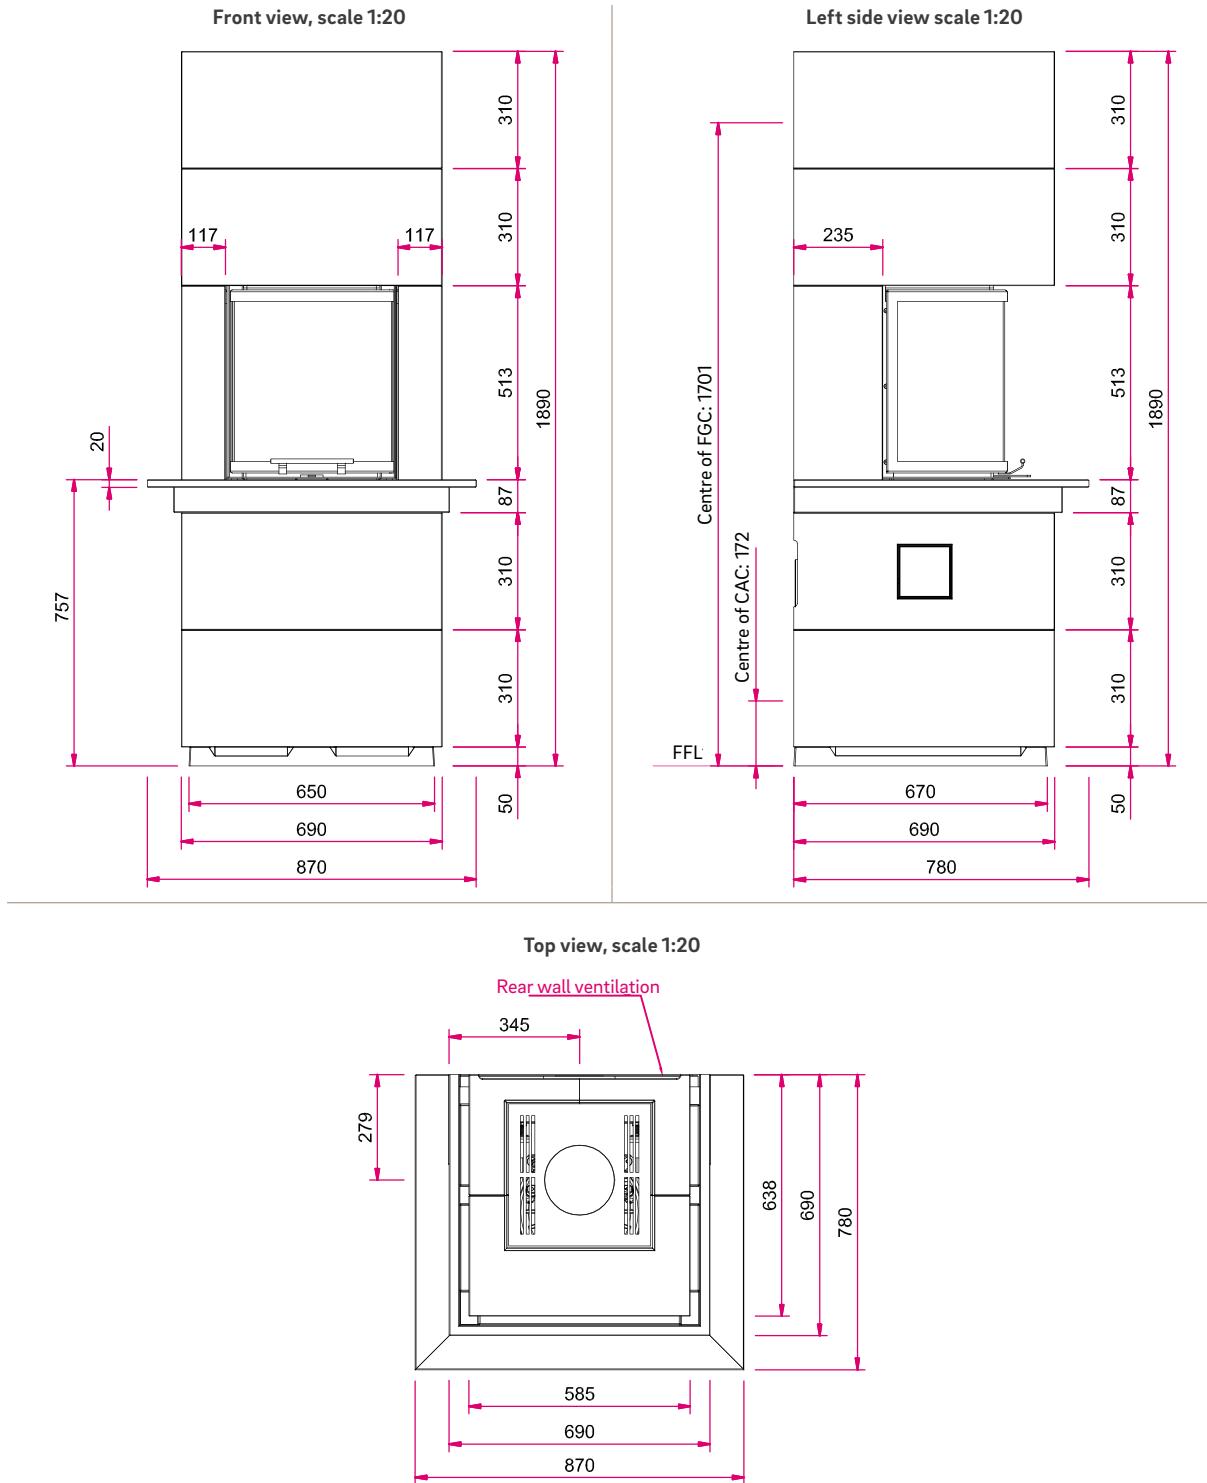


Figure: S12 Short with 2nd Base, H 310 mm and Grigio matt natural stone bench (with overhang) | Surface finish: Camina silicate paint

Standard	Total weight	Optional	Accessories	Storage concrete	Fireplace insert
 base, H 310 mm	 approx. 487 kg		 SMR  Spark protection plate	 Blanco Carrara  Mocca Creme  Nero matt	 <p>Ekko U 45(34)51 h Nominal heat output: 4 kW Flue gas connector: Ø 160 mm</p>
 Guillotine door					 Energy efficiency class as per (EU) 2015/1186
 Front Kristall					More information at www.camina-schmid.de
 Rear-ventilated back wall					

S12 Short 2nd Base and natural stone bench

Dimensional drawing



Note on left side view scale 1:20: AS (FGC): Flue gas connector, VLS (CAC): Combustion air connector, OKFF (FFL): Finished floor level

Please note the information on **optional accessories** in our price list.

Illustrations are similar. All photos and drawings are protected by copyright. Usage or publication, even of individual details, is only permitted with our authorisation. There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2019