

Fireplace cassette inserts pro

Data sheet

Details

- Ideal as replacement models for over 100 different models from well-known manufacturers
- Environmentally-friendly combustion with efficient flue gas guidance
- Higher efficiency due to power-free automatic control
- Comfortable installation due to height-adjustable feet
- Different models

Model selection



1 side



2 side left



2 side right



3 side



Panorama



Round glass



Curved arch



Tunnel version

Triple values to calculate the chimney in accordance with EN 16510-2-2

HK 65

- Nominal heat output 6,5 kW
- Max. loading capacity 2,0 kg
- Flue gas mass flow 6,79 g/s
- Flue gas temperature 282 °C
- Minimum delivery pressure 12 Pa

HK 80

- Nominal heat output 8 kW
- Max. loading capacity 2,5 kg
- Flue gas mass flow 8,6 g/s
- Flue gas temperature 269 °C
- Minimum delivery pressure 12 Pa

HK 100

- Nominal heat output 10 kW
- Max. loading capacity 3,0 kg
- Flue gas mass flow 10,4 g/s
- Flue gas temperature 256 °C
- Minimum delivery pressure 12 Pa

HK 125

- Nominal heat output 12,5 kW
- Max. loading capacity 3,75 kg
- Flue gas mass flow 13,17 g/s
- Flue gas temperature 271 °C
- Minimum delivery pressure 12 Pa

HK 150

- Nominal heat output 15 kW
- Max. loading capacity 4,2 kg
- Flue gas mass flow 15,93 g/s
- Flue gas temperature 286 °C
- Minimum delivery pressure 12 Pa

HK 65 - HK 125



Energieeffizienzklasse nach (EU) 2015/1186

HK 150



Energieeffizienzklasse nach (EU) 2015/1186



There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 02/2026

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 65
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 65
Energy efficiency class:	A+
Direct heat output (kW)	6,5
Indirect heat output (kW):	–
Energy efficiency index (EEI):	109
Energy efficiency at nominal heat output (%):	81,4
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!


There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid HK 65

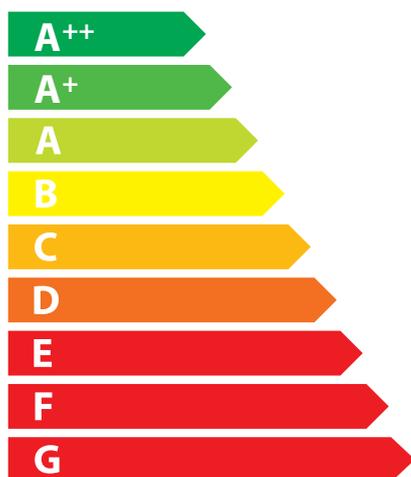

6,5
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 80
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 80
Energy efficiency class:	A+
Direct heat output (kW)	8,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	110,6
Energy efficiency at nominal heat output (%):	82,5
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!

There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021




ENERG
енергия · ενέργεια



Camina  Schmid HK 80



A⁺

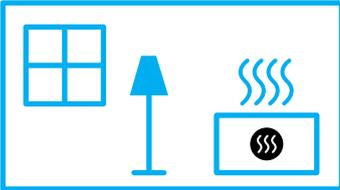

8,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 100
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 100
Energy efficiency class:	A+
Direct heat output (kW)	10,0
Indirect heat output (kW):	-
Energy efficiency index (EEI):	112,1
Energy efficiency at nominal heat output (%):	83,5
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!



There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid HK 100

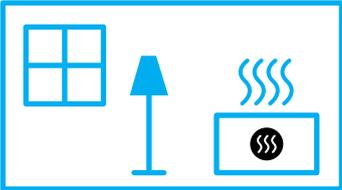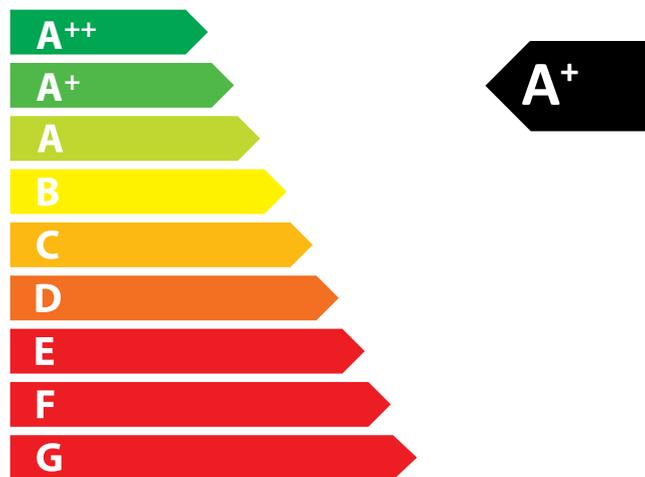

10,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 125
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 125
Energy efficiency class:	A+
Direct heat output (kW)	12,5
Indirect heat output (kW):	-
Energy efficiency index (EEI):	110
Energy efficiency at nominal heat output (%):	82,1
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!



There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid HK 125

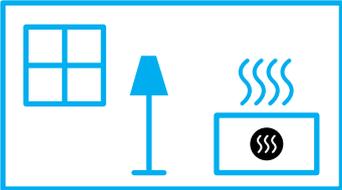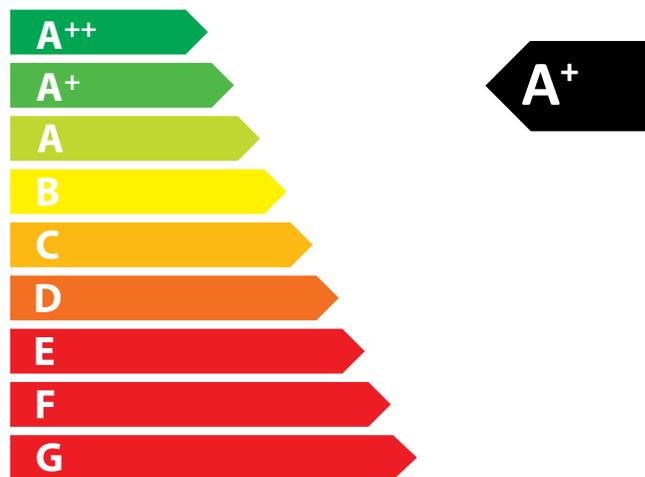

12,5
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	HK 150
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	HK 150
Energy efficiency class:	A+
Direct heat output (kW)	15,0
Indirect heat output (kW):	–
Energy efficiency index (EEI):	108
Energy efficiency at nominal heat output (%):	80,6
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!


There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid HK 150

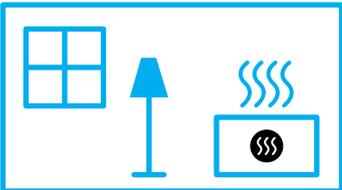

15,0
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186