

NEO-Line 6554

Data sheet

Details

- Standard finish Kristall
- Grand view upon fire
- Rail handle in Anthracite
- Door with self-locking closure
- Caloceram® firebox inner lining
- Easy and time efficient installation
- Adjustable feet
- Several frame options



NEO-Line 6554

Technical data

	DE	EXPORT
• Nominal heat output	5,9kW	6,9kW
• Thermal output range*	3,4 – 6,2kW	4,0 – 7,1kW
• Efficiency	> 80%	> 80%
• Insulation thickness (with wall that does not need to be protected) (based on SILCA® 250KM)	60 mm	60 mm
• Flue gas connector	Ø150 mm	Ø153 mm**
• Combustion air connector	Ø100 mm	Ø100 mm
• Combustion air requirement	21,0 m³/h	24,5 m³/h
• Recommended quantity of wood, approx.	1,7 kg	2,0 kg
• Recommended length of logs	33 cm	33 cm
• Weight	95 kg	95 kg

Data for chimney sweep according to DIN EN 13384 (closed operation)

Triple values with nominal heat output

• Flue gas mass flow	6,7 g/s	7,1 g/s
• Flue gas temperature	204°C	224°C
• Required delivery pressure	12 Pa	12 Pa


Standard



Optional



Accessories



* The thermal output range is dependent on the volume and quality of wood loaded. Only use the nominal heat output triple values to calculate the chimney.

** DE: Attached on the outside (standard), EXPORT: Attached on the insert (some export)

There may be modifications to the colour and technical details caused by ongoing developments; subject to errors and omissions. Dated: 07/2018



Energy efficiency class in accordance with (EU) 2015/1186



Energy efficiency class in accordance with (EU) 2015/1186




1. Federal Emissions Control Ordinance Stage 2




NEO-Line 6554

Dimensional drawings


Front view, scale 1:20




Side view, scale 1:20



Rear view, scale 1:20



Top view, scale 1:20



Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	NEO-Line 6554
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	NEO-Line 6554
Energy efficiency class:	A+
Direct heat output (kW)	5,9
Indirect heat output (kW):	–
Energy efficiency index (EEI):	107,0
Energy efficiency at nominal heat output (%):	80,7
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!


There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid NEO-Line 6554

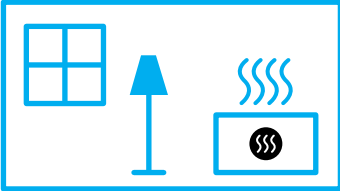

5,9
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186

Product data sheet

Regulation (EU) 2015/1186 supplementing Directive 2010/30/EU

	NEO-Line 6554
Supplier's name:	Camina & Schmid Feuerdesign und Technik GmbH & Co. KG
Supplier's model identifier:	NEO-Line 6554
Energy efficiency class:	A
Direct heat output (kW)	6,9
Indirect heat output (kW):	–
Energy efficiency index (EEI):	106,3
Energy efficiency at nominal heat output (%):	80,2
Notes for specific precautions, installation or maintenance:	Please note the reference in the assembly instructions and operating manuals!



There may be modifications to technical details caused by ongoing developments; subject to errors and omissions. Dated: 11/2021



ENERG
енергия · ενέργεια



Camina  Schmid NEO-Line 6554

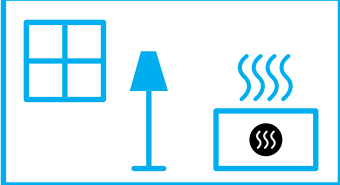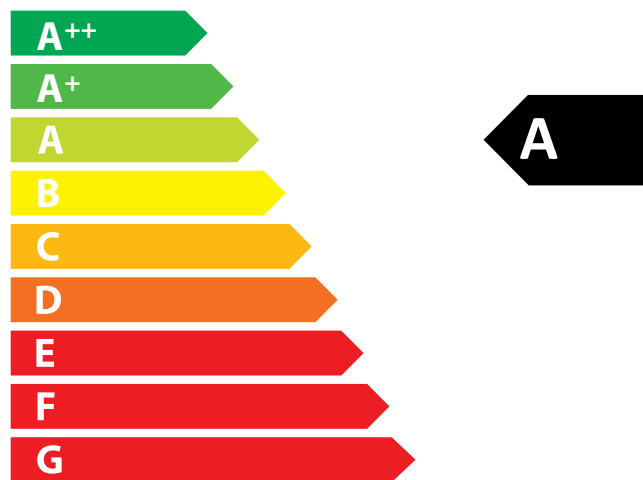

6,9
kW

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2015/1186